
<u>contents</u>							
Overview	Standard	Features	Optional Features	Service and S	Support	Pre-config	jured Models
Smart Buys	Configu	uration Infor	mation - Factory Integ	grated Models	Core Opt	tions A	dditional Options
Memory	Storage	Technical	Specifications				

Overview


HP ProLiant DL585 Generation 7 (G7)

Powered by latest AMD Opteron® 8, 12 and 16 core processors, the HP ProLiant DL585 G7 is the most expandable 4P multi-core rack mount server ideal for server virtualization, server consolidation, multi-tiered enterprise application, and corporate infrastructure applications.

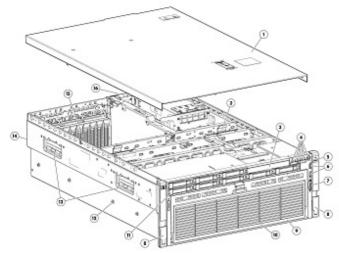

Front View:

- 1. Quick Removal Access Panel
- 2. 4 Hot Plug Redundant Fans Standard on all models
- 3. Slimline Drive (DVD Drive optional)
- 4. Front Panel LED Display and Power Button
- 5. Slide-out Systems Insight Display
- 6. Two front accessible USB 2.0 ports
- 7. One front video port
- 8. Quick release levers for fast server access
- 9. Front accessible Processor and memory drawer
- 10. Support for up to four AMD Opteron processors
- 11. Support for up to eight hot plug Small Form-Factor (SFF) 11. PCI-Express or PCI-X option (slots 1-6) SAS/ Serial ATA (SATA)/Solid State drives
- 12. Universal Tool-less "Snap In" Sliding Rail Solution
- 13. Server Lifting Handles
- 14. 4U (7" Height) Rack Form Factor
- 15. Up to eleven available PCI Express/PCI-X Internal Expansion Slots

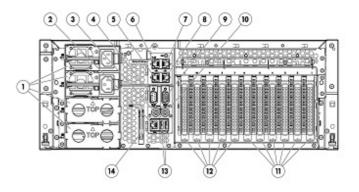

Rear View:

- 1. Hot Plug Redundant Power supplies (2 or 4 ship depending on the model)
- 2. Integrated Lights-Out 3 port
- 3. Mouse port
- 4. Serial port
- 5. Gigabit NIC Ports
- 6. Gigabit NIC Ports
- 7. Gigabit NIC Ports
- 8. Gigabit NIC Ports
- 9. Video port
- 10. Keyboard port
- 12. PCI-Express slots (slots 7-11)
- 13. Two USB ports
- 14. Service tool

What's New

- Support for new AMD Opteron[™] 6300 series 16 core processors
- Flexible technologies provide customer choice in networking with either a Broadcom or Qlogic solution
- Support for LRDIMM and Input/Output Memory Management Unit (IOMMU)

Overview	Standard	Features	Optional Features	Service and S	upport	Pre-confi	gured Models
Smart Buys	Config	uration Infor	mation - Factory Integ	rated Models	Core Op	tions /	Additional Options
Memory	Storage	Technical	Specifications				

Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor	Sixteen-Core Processors				
Two or four of the	AMD Opteron™ 6386SE (2.8GHz/16-core/16MB/140W) Processor				
following depending on	AMD Opteron™ 6380 (2.5GHz/16-core/16MB/115W) Processor				
Model	AMD Opteron [™] 6378 (2.4GHz/16-core/16MB/115W) Processor				
	AMD Opteron™ 6376 (2.3GHz/16-core/16MB/115W) Processor				
	AMD Opteron™ 6366HE (1.8GHz/16-core/16MB/85W) Processor				
	AMD Opteron™ 6284SE (2.7GHz/16-core/16MB/140W) Processor				
	AMD Opteron™ 6278 (2.4GHz/16-core/16MB/115W) Processor				
	AMD Opteron™ 6282SE (2.6GHz/16-core/16MB/140W) Processor				
	AMD Opteron™ 6276 (2.3GHz/16-core/16MB/115W) Processor				
	AMD Opteron [™] 6272 (2.1GHz/16-core/16MB/115W) Processor				
	AMD Opteron [™] 6274 (2.2GHz/16-core/16MB/115W) Processor				
	AMD Opteron™ 6262HE (1.6GHz/16-core/16MB/85W) Processor				
	Twelve-Core Processors				
	AMD Opteron™ 6348 (2.8GHz/12-core/16MB/115W) Processor				
	AMD Opteron™ 6344 (2.6GHz/12-core/16MB/115W) Processor				
	AMD Opteron [™] 6238 (2.6GHz/12-core/16MB/115W) Processor				
	AMD Opteron [™] 6234 (2.4GHz/12-core/16MB/115W) Processor				
	AMD Opteron [™] 6176SE (2.3GHz/12-core/12MB/140W) Processor				
	AMD Opteron [™] 6174 (2.2GHz/12-core/12MB/115W) Processor				
	AMD Opteron [™] 6172 (2.1GHz/12-core/12MB/115W) Processor				
	AMD Opteron [™] 6168 (1.9GHz/12-core/12MB/115W) Processor				
	AMD Opteron [™] 6164HE (1.7GHz/12-core/12MB/85W) Processor				
	AMD Opteron [™] 6166HE (1.8GHz/12-core/12MB/85W) Processor				
	AMD Opteron™ 6176 (2.3GHz/12-core/12MB/115W) Processor				
	AMD Opteron™ 6180SE (2.5GHz/12-core/12MB/140W) Processor				
	Eight-Core Processors				
	AMD Opteron [™] 6328 (3.2GHz/8-core/16MB/115W) Processor				
	AMD Opteron [™] 6320 (2.8GHz/8-core/16MB/115W) Processor				
	AMD Opteron [™] 6220 (3.0GHz/8-core/16MB/115W) Processor				
	AMD Opteron [™] 6212 (2.6GHz/8-core/16MB/115W) Processor				
	AMD Opteron [™] 6128 (2.0GHz/8-core/12MB/115W) Processor				
	AMD Opteron™ 6132HE (2.2GHz/8-core/12MB/85W) Processor				
	AMD Opteron [™] 6136 (2.4GHz/8-core/12MB/115W) Processor				
	AMD Opteron™ 6140 (2.6GHz/8-core/12MB/115W) Processor				
	Four-Core Processor				
	AMD Opteron™ 6308 (3.5GHz/4-core/16MB/115W) Processor				
	AMD Opteron™ 6204 (3.3GHz/4-core/16MB/115W) Processor				
	 NOTE: Processor wattage references reflect Thermal Design Power (TDP). For more information on TDP and Average CPU Power (ACP) visit: http://www.amd.com/acp. NOTE: SmartStart version 8.70B or greater required by 6200 series processors. Latest version can be downloaded from the web at http://www.hp.com/go/foundation. 				
Cache Memory	16MB Level 3 cache				
Chipset	AMD SR5690/SP5100				

Upgradeability Upgradeable to quad (4) processors

Memory Protection	Advanced ECC capabil	lities
	Online Spare Memory	
Memory	Туре	PC3-10600R Registered DDR3 (1333MHz)
One of the following	Performance Models	128GB (16x8GB) of PC3-10600R (DDR3-1333)
depending on Model	One of the following depending on Model	64GB (8x8GB) of PC3-10600R (DDR3-1333) 64GB (16x4GB) of PC3-10600R (DDR3-1333)
		32GB (8x4GB) of PC3-10600R (DDR3-1333)
		32GB (4x8GB) of PC3-10600R (DDR3-1333)
		32GB (8x4GB) of PC3-10600R (DDR3-1333)
	Base Models	32GB (8x4GB) of PC3-10600 (DDR3-1333)
	Maximum	1.5TB

Expansion Slots

NOTE: Up to 11 FL/FH I/O slots. 2 PCI-E 2.0x16 and 3 PCI-E 2.0 x8 slots standard.

Expansion Slots (Main IO Board standard)

Expansion Slots #	Technology	Bus Width	Connector Width	Form Factor	Notes
1	N/A	N/A	N/A	N/A	
2	N/A	N/A	N/A	N/A	
3	N/A	N/A	N/A	N/A	
4	N/A	N/A	N/A	N/A	
5	N/A	N/A	N/A	N/A	
6	N/A	N/A	N/A	N/A	
7	PCI-Express	x8	x16	Full Length/Full Height	
8	PCI-Express	×8	x16	Full Length/Full Height	
9	PCI-Express	x16	x16	Full Length/Full Height	
10	PCI-Express	x8	x16	Full Length/Full Height	
11	PCI-Express	x16	x16	Full Length/Full Height	

Expansion Slots with IO Expander (combination PCI-X, PCI-e and 300W GPU

Expansion Slots #	Technology	Bus Width	Connector Width	Form Factor	Notes
1	PCI-X	64-bit	N/A	Full Length/Full Height	
2	PCI-X	64-bit	N/A	Full Length/Full Height	
3	PCI-Express	x4	x8	Full Length/Full Height	
4	PCI-Express	x8	x16	Full Length/Full Height	
5	PCI-Express	x8	x16	Full Length/Full Height	
6	PCI-Express	x16	x16	Full Length/Full Height	
				Full Lanoth/Full	

7	PCI-Express	x8	x16	run Lengun run Height
8	PCI-Express	x8	x16	Full Length/Full Height
9	PCI-Express	x16	x16	Full Length/Full Height
10	PCI-Express	x8	x16	Full Length/Full Height
11	PCI-Express	x16	x16	Full Length/Full Height

Expansion Slots with I/O Expander (standard PCI-e option)

• •		,			
Expansion Slots #	Technology	Bus Width	Connector Width	Form Factor	Notes
1	PCI-Express	x8	x16	Full Length/Full Height	
2	PCI-Express	x8	x16	Full Length/Full Height	
3	PCI-Express	x16	x16	Full Length/Full Height	
4	PCI-Express	x8	x16	Full Length/Full Height	
5	PCI-Express	x8	x16	Full Length/Full Height	
6	PCI-Express	x16	x16	Full Length/Full Height	
7	PCI-Express	x8	x16	Full Length/Full Height	
8	PCI-Express	x8	x16	Full Length/Full Height	
9	PCI-Express	x16	x16	Full Length/Full Height	
10	PCI-Express	x8	x16	Full Length/Full Height	
11	PCI-Express	x16	x16	Full Length/Full Height	

Drive
drives

	NOTE: There is an extra i	internal SSD slot available as well			
Interfaces	Serial	1			
	Video	1 front, 1 rear			
	Network RJ-45 (Ethernet)				
	iLO 3 Remote	1			
	Management				
	Keyboard	1			
	Pointing Device (Mouse)	1			
	SD Slot	1			
	USB 2.0 Ports	6 total: 2 front; 2 rear; 2 internal			
Industry Standard	ACPI 2.0. Compliant				
Compliance	PCI 2.0 Compliant				
	PXE Support				
	WOL Support				
	Physical Address Extens	ion (PAE) Support			
	Microsoft® Logo certifica	tions			
	USB 2.0 Support				
Server Power Cords	NOTE: If customers require a power cord, they can check the power cord matrix for the appropriate sku. Please see the following power cord matrix for details: http://www.hp.com/go/powercordmatrix				
Power Specifications	To review typical system power ratings use the HP Power Advisor which is available via the online tool located at URL: www.hp.com/go/hppoweradvisor .				
		on and Technical Content for supported power supplies can be found at: pm/products/quickspecs/14209_na/14209_na.html			
Common Slot Power Supply	NOTE: Mixing of power supplies in the same server is not supported. All power supplies inside a server must be exactly the same model. Mixing Gold, Platinum, and Platinum Plus certified power supplies is not supported.				
	range of ProLiant and Interprovide the highest power supplies are tested by the ECOS 80 Plus power sup up to 94% (80 Plus Platin 1200W - allowing the cust	ower supplies allow for commonality of power supplies across a wide egrity servers, as well as HP Storage solutions, and are designed to supply efficiency without degrading system performance. HP CS power e Electric Power Research Institute (EPRI) and certified through the ply program. HP CS power supply options provide efficiency ratings of um) and are available in three power output options - 460W, 750W, and omer to "right-size" a power supply for their specific server imon Slot power sources are UL, CE Mark Compliant, hot-plug and irrations.			
	HP CS Platinum Plus power supplies are required when enabling HP's Intelligent Power Discovery (IPD) solution. IPD is the first technology to create an automated, energy-aware network between IT systems and facilities. This allows your company to reclaim millions of dollars in wasted power capacity and downtime costs across data centers. For more information on HP's IPD solution, go to www.hp.com/go/ipd.				
	It is highly recommended that you use the HP Power Advisor in defining the "Right-Size" power supply for your needs. HP Power Advisor can be accessed at: www.hp.com/go/hppoweradvisor .				
	NOTE: The 80 PLUS program is a unique forum that unites electric utilities, the computer industry, and consumers in an effort to bring energy efficient technology solutions to the marketplace. 80 Plus independently tests power supply efficiency and publicly posts the results on 80Plus.org.				
	Redundant Power: Optional (1+ 1 or n+n redundant) power supplies can be purchased through				

SSD **NOTE:** There is an extra internal SSD slot available as well

	and the sector of the				
		(see Power Supplies for part numbers).			
		ion and Technical Content for supported power supplies can be found at: om/products/quickspecs/14209_na/14209_na.html			
	NOTE: Two Hot Plug Power Supplies ships standard with 2P Models. Four Hot Plug Power Supplies ship standard with 4P Models.				
System Fans	4 Hot plug, redundant fans (individually removable)				
Required Cabling	For required cabling information, refer to the HP Web site at: www.hp.com/servers/dl585				
Operating Systems and Virtualization Software Support for ProLiant Servers	 Microsoft Windows Server Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) Oracle Solaris VMware Citrix XenServer NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server including how to purchase from HP, please visit our OS Support Site at: www.hp.com/go/ossupport 				
Graphics	Integrated ATI RN-50 1600x1280x64K 16M color (32 MB DDR1 memory)				
Form Factor	Rack (4U = 7 inches), ships with sliding rails and cable management system Space saving form factor (4U) provides space efficiencies while providing maximum deployment flexibility				
HP Insight management	HP Service Pack for ProLiant	HP Service Pack for ProLiant is an enhanced, re-packaging of ProLiant systems software and firmware, but is still based on the rich legacy of ProLiant Support Packs (PSPs) and HP Smart Update Firmware DVD that are originally found in the Insight Foundation suite for ProLiant. It is a comprehensive systems software and firmware release offered as a tested solution on all ProLiant servers supported by Insight Foundation version 8.70. It evolves beyond separate installation of HP PSPs and the HP Smart Update Firmware DVD by providing a single image that combines both of these products. It offers combined firmware and systems software packaging and improved processes for drivers, utilities, agents, non agents, and other utilities that are required to keep pace in today's rapidly expanding technology infrastructure.			
		Main or base releases for HP Service Pack for ProLiant are planned approximately 3 times a year, but look for interim update releases that will capture hot fixes released between main releases. HP Service Pack for ProLiant is supported on all HP ProLiant SL/ML/DL 100, 300, 500, 700, and 900 servers and BladeSystems series servers that are supported with Insight Foundation version 8.70 and will supersede and replace Insight Foundation. It is downloadable from: www.hp.com/go/server/service_packs/updates as a web only release and is not available on media.			
		The first release of HP Service Pack for ProLiant is Version 2011.06.0. It contains the first comprehensive collection of firmware and system software components, all tested together that include drivers, agents, non-agents, utilities, firmware packages for servers, controllers, storage, blades, enclosures, and all components and options supported by HP ProLiant Support Packs for Windows and Linux version 8.70. Additionally, VMware offline firmware updates will be included.			
	HP Insight Foundation	More information can be found at this link for HP Service Pack for ProLiant: www.hp.com/go/server/service_packs Insight Foundation is being baselined at version v8.70 which means the			

		following:
		 Its Media Kit (contains 2 SmartStart CDs, the Firmware DVD, and the Management DVD) will continue to ship with all supported ProLiant G7 or earlier pre-configured servers until the last supported server is no longer shipping. The Media Kit will not be updated past version 8.70. ProLiant G7 or earlier factory integrated servers are able to order the Media Kit with the understanding that the media is not updated. Please check specific server QuickSpecs for availability of factory integratable Kit. PSP and Firmware DVD downloads will be updated through 2Q 2012 at the HP Insight Foundation Suite for ProLiant downloads tab: http://www.hp.com/go/foundation
		Customers are urged to use the replacement product, HP Service Pack for ProLiant, instead of Insight Foundation Suite which is found at these location:
		www.hp.com/go/sppwww.hp.com/go/spp/download
	HP Integrated Lights-Out (iLO)	HP Integrated Lights-Out (iLO) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP iLO functions without additional software and can be accessed from any location via a web browser. HP iLO works hand-in-hand with HP Systems Insight Manager, Insight Control suites, and Insight Dynamics for ProLiant, helping customers unleash the value of the ProLiant platform and deliver the highest possible quality of IT service. For more information, visit: www.hp.com/go/iLO
Intelligent Manageability	Drive Parameter Tracking	Log (IML) ery-2 (ASR-2) r (RBSU) g (with Smart Array Controllers) g (with Smart Array Controllers) yers processors, SAS hard drives and memory)
HP Insight Online	secure access to product Online can automatically With Insight Online's eas	w capability available through the HP Support Center portal for one stop, t and HP support information specific to your IT environment. Insight display devices remotely monitored by HP Insight Remote Support. y navigation you can efficiently track your IT support contracts and here and at anytime. www.hp.com/go/insightonline
Security	Power-on password Keyboard password Diskette drive control ena Diskette boot control ena External USB port enable Network Server Mode Serial interface control Administrator's password Removable optical drive	ble/disable /disable
Warranty	worldwide network of HP	y a global limited warranty and supported by HP Services and a Authorized Channel Partners resellers. Hardware diagnostic support and e years from date of purchase. Support for software and initial setup is

available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details. **NOTE:** Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html.

<u>contents</u>							
Overview	Standard	Features	Optional Features	Service and S	upport F	Pre-configured N	lodels
Smart Buys	Configu	uration Inform	nation - Factory Integ	rated Models	Core Opti	ons Addition	al Options
Memory	Storage	Technical S	Specifications				

Optional Features

HP Insight management	HP Insight Control	HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console.
		Two versions of Insight Control are available, to serve environments requiring either a Linux-based or a Windows-based central management server: HP Insight Control for Linux, and HP Insight Control. See www.hp.com/go/insightcontrol
		HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: http://www.hp.com/services/insight.
	HP iLO Advanced	HP Integrated Lights-Out Advanced License a product option, providing smart remote server management without compromise. iLO Advanced unlocks the full set of remote administration functionality for all HP ProLiant servers by activating the full Virtual Keyboard Video and Mouse remote console, multi-user collaboration, console record and replay, GUI-based and scripted virtual media and virtual folders, and enhanced security and power management functionality. For more information, see: http://www.hp.com/go/iloadvance
	HP Insight Dynamics for ProLiant	HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. As a powerfully integrated by design toolkit to accelerate complex technology projects and simplify daily operations that ultimately enable IT Staff personnel to dynamically keep pace with the organizations changing business requirements. It enables them to plan capacity and power continuously, balance across physical and virtual resources, and ensure cost-effective high availability. It also enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a self-service portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements. In addition to the previous functional benefits, it also provides a cost-effective disaster recovery for physical and virtual environments that works with HP Continuous Access software for both the Enterprise Virtual Array and the XP storage array allowing application environments to be reactivated in minutes with the touch of a button to a remote location.
		NOTE: For more information, visit:

http://www.hp.com/go/insightdynamics

High Performance Clusters	HP Cluster Platforms	HP Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters
	HP HPC Interconnects	High Performance Computing (HPC) interconnect technologies are available for this server as part of the HP Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HP when integrated within an HP cluster. Flexible, validated solutions can be defined with the help of configuration tools. http://www.hp.com/techservers/clusters/ucp/index.html
	HP Cluster Management Utility	HP Cluster Management Utility (CMU) is an HP-licensed and HP- supported suite of tools that are used to manage large-scale Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. http://www.hp.com/go/cmu
	HP HPC Linux Value Pack	HP HPC Linux Value Pack (Value Pack) is an HP-licensed and HP- supported specially priced software bundle for the development and deployment of applications on HPC Cluster Platforms. Value Pack includes the Platform HPC Enterprise Edition suite of tools including the LSF workload scheduler, the HP-MPI parallelization library. Also included are the HP Unified Parallel C compiler and the HP Shmem library, as well as the execution environments for the libraries and compiler. HP HPC Linux Value Pack
Solutions	applications, as well as	customers running compute- or I/O intensive database and transaction data centers using virtualization and consolidation to reduce server ed 4-processor HP ProLiant DL585 G7 server delivers maximum

sprawl, the rack optimized 4-processor HP ProLiant DL585 G7 server delivers maximum performance and high availability for highly complex, business critical applications. Specifically, the HP ProLiant DL585 G7 would be excellent for running the following types of applications:

Typical Usage:

- x86 virtualization and consolidation projects
- Electronic Design Automation (EDA)/Semiconductor
- Financial
- Large database applications
- ERP / CRM
- Petrochemical
- Life Science and Material Science
- Video Rendering

Storage Software Whether you need to challenge, or deliver

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HP storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- Data Protection and Recovery Software Whether you're a large enterprise or a smaller business, HP data protection and recovery
- software will cost-effectively protect you against disaster and ensure business continuity.
 Data Archive and Migration Software
 HP's storage software enables you to comply with data retention and retrieval
 requirements, improve application performance, and reduce costs by efficiently migrating
 infrequently accessed or less valuable data to lower cost storage.
- Storage Resource Management Software (SRM) HP's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- Data Replication Software HP offers array-based and host-based replication software for use in disaster recovery,

	 testing, application development and reporting. Storage Device Management Software Maximize your investment in HP storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management. HP StoreVirtual VSA With HP StoreVirtual VSA you can use the power of virtualization to turn a set of heterogeneous and disconnected physical disk drives in your servers and storage devices into a single pool of logical storage capacity.
	NOTE: For more information available Storage Software including QuickSpecs, please see: www.hp.com/go/storage/software.
HP Proactive Insight experience	Prevent problems with innovative, automated monitoring tools and proactive services. The HP Proactive Insight experience consist of using Insight Online, Insight Remote Support, and Proactive Care Support Service as one integrated solution. The Proactive Insight experience provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit: www.hp.com/go/proactiveinsightexperience
Factory Express Portfolio for Servers and Storage	HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.
	Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.
	For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express .
HP Simple Configurator	SCE is a guided self service tool to help sales and non technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator

Overv	iew	Standard	Features	Optional Features	Service and S	Support	Pre-co	nfigured Models
Smart	Buys	Config	uration Infor	mation - Factory Integ	grated Models	Core O	ptions	Additional Options
Memo	ry	Storage	Technical	Specifications				

Service and Support

Service and Support HP Technology Services for Industry Standard Servers and BladeSystem

Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best - the experienced professionals at HP Services.

What HP ProLiant and BladeSystem Services can do for you

HP ProLiant and BladeSystem Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. This way, HP proposes services solutions that include more than just uplift of base warranty. You can get the support you need by choosing from one of a number of service packaged solutions we have designed to address wider set of customer support needs.

HP Technology Services meets business challenges with services offered in three packages - **Optimized Care Package, Standard Care Package, and Basic Care Package** - available for each product group. Such packaged solutions enable customers to optimize technology

operations, minimize risk and drive better business outcomes with easy-to-buy, easy-to-use scalable support packages for servers, storage, networking and software. **Optimized Care** Optimized Care Package: Supports maintaining servers at optimum performance availability **HP ProLiant Server Hardware Installation** Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN HP Installation and Startup for SIM (Systems Insight Manager) Provides for installation and configuration of the latest version of HP Systems Insight Manager. together with the installation and startup of HP Service Essentials Remote Support Pack http://h20195.www2.hp.com/v2/GetPDF.aspx/5982-4143EN.pdf 3-Year HP Critical Advantage Provides end-to-end infrastructure support solution for business critical applications running on virtualized/x86 infrastructures, enabling the customers to cost effectively build, operate, and continuously improve their IT environment http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA3-1772ENW Additional Services: Microsoft or Linux or VMware education courses + Facility & technology environmental assessment services + Energy Efficiency Design, Factory Express **Standard Care** Standard Care Package: Package that maintains high level of server availability **HP ProLiant Server Hardware Installation** Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN HP Installation and Startup for SIM (Systems Insight Manager) Provides for installation and configuration of the latest version of HP Systems Insight Manager, together with the installation and startup of HP Service Essentials Remote Support Pack http://h20195.www2.hp.com/v2/GetPDF.aspx/5982-4143EN.pdf 3-Year HP 6 hour Hardware Support Onsite Call-to-Repair Service Provides an IT manager with a team of support specialists who will guickly begin troubleshooting the system to help return the hardware to operating condition within 6 hours of the initial service request to the HP Global Solution Center http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EN.pdf 3-Year , HP 24x7 Software Support for Insight Control Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6645EEE.pdf Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up, and Software Support: Install and Startup Services for Insight Control: Microsoft or Linux or VMware education courses; +30 Proactive Select Credits, Factory Express **Basic Care** Basic Care Package: delivers minimum recommended support service level **HP ProLiant Server Hardware Installation** Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN 3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML

and DL series servers or HP BladeSystem servers http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf

Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up and Software Support); +10 Proactive Select Credits, Factory Express

Insight Remote Support The packages include HP Insight Remote Support that uses proven technology to deliver secure, reliable 24x7 remote monitoring, diagnoses, and problem resolution. It is available at no additional cost to all warranty, HP Care Pack Service, and service agreement customers.

For more info	ormation	sales repres	ore on HP ProLiant serve sentative or HP Authoriz hp.com/services/proliant	ed Channel Partr	•		our HP
<u>contents</u>							
Overview	Standard	Features	Optional Features	Service and S	Support F	Pre-configured Mode	els
Smart Buys	Configu	uration Infor	mation - Factory Integ	rated Models	Core Opti	ons Additional O	ptions
Memory	Storage	Technical	Specifications				

Pre-configured Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

NOTE: HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

NOTE: If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

NOTE: Not all models are available in all regions. Check with your local country HP offices for availability.

NOTE: SmartStart version 8.70B or greater required by 6200 series processors. Latest version can be downloaded from the web at http://www.hp.com/go/foundation.

Performance Models

HP ProLiant DL585 G7 6386SE 4P 128GB-R P410i/1GB FBWC 1200W RPS	Processors	(4) AMD Opteron [™] 6386SE (2.8GHz/16- core/16MB/140W) Processors
Server	Cache Memory	16MB L3 cache
704160-xx1	Memory	128GB (16x8GB) of PC3-10600R (DDR3-1333) NOTE: 48 DIMM slots.
	Network Controller	HP Ethernet 1Gb 4-port 331i-SPI Adapter
	Storage Controller	Embedded HP Smart Array P410i/1G FBWC Controller
	Hard Drives	None ship standard
	Internal Storage	Up to 8TB of internal storage (SFF SAS)
	Optical Drive	None ship standard
	Power Supply	Four 1200W Platinum Power Supplies standard
	Fans	4 Hot plug, redundant fans (individually removable)
	Integrated Lights Out	Integrated Lights-Out 3 (iLO 3) ships standard
	Insight Control	HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates
	Form Factor	4U Rack
	Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.

704159-xx1	a . u	
704159-xx1	Cache Memory	16MB L3 cache
	Memory	128GB (16x8GB) of PC3-10600R (DDR3-1333) NOTE: 48 DIMM slots.
	Network Controller	HP Ethernet 1Gb 4-port 331i-SPI Adapter
	Storage Controller	Embedded HP Smart Array P410i/1G FBWC Controller
	Hard Drives	None ship standard
	Internal Storage	Up to 8TB of internal storage (SFF SAS)
	Optical Drive	None ship standard
	Power Supply	Four 1200W Platinum Power Supplies standard
	Fans	4 Hot plug, redundant fans (individually removable)
	Integrated Lights Out	Integrated Lights-Out 3 (iLO 3) ships standard
	Insight Control	HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates
	Form Factor	4U Rack
	Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.
HP ProLiant DL585 G7 6376 4P 64GB-R P410i/1GB FBWC 1200W RPS Server	Processors	(4) AMD Opteron™ 6376 (2.3GHz/16- core/16MB/115W) Processors
708687-xx1	Cache Memory	16MB L3 cache
	Memory	64GB (8x8GB) of PC3-10600R (DDR3-1333) NOTE: 48 DIMM slots.
	Network Controller	HP Ethernet 1Gb 4-port 331i-SPI Adapter
	Storage Controller	Embedded HP Smart Array P410i/1G FBWC Controller
	Hard Drives	None ship standard
	Internal Storage	Up to 8TB of internal storage (SFF SAS)
	Optical Drive	None ship standard
	Power Supply	Four 1200W Platinum Power Supplies standard
	Fans	4 Hot plug, redundant fans (individually removable)
	Integrated Lights Out	Integrated Lights-Out 3 (iLO 3) ships standard
	Insight Control	HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Update
	Form Factor	4U Rack
	Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.
HP ProLiant DL585 G7 6282SE 4P 128GB-R Hot Plug SFF 1200W PS	Processors	(4) AMD Opteron™ 6282SE (2.6GHz/16- core/16MB/140W) Processors
Server	Cache Memory	16MB L3 cache
653745-xx1	Memory	128GB (16x8GB) of PC3-10600R (DDR3-1333) NOTE: 48 DIMM slots.
	Network Controller	HP NC375i Integrated Quad Port Gigabit Server Adapter
	Storage Controller	Embedded HP Smart Array P410i/1G FBWC Controller
	Hard Drives	None ship standard
	Internal Storage	Up to 8TB of internal storage (SFF SAS)
	Optical Drive	None ship standard
	Power Supply	Four 1200W Platinum Power Supplies standard
	Fans	4 Hot plug, redundant fans (individually removable)

	Integrated Lights Out	Integrated Lights-Out 3 (iLO 3) ships standard
	Insight Control	HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates
	Form Factor	4U Rack
	Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.
HP ProLiant DL585 G7 6276 4P 128GB- R Hot Plug SFF 1200W PS Server	Processors	(4) AMD Opteron [™] 6276 (2.3GHz/16- core/16MB/115W) Processors
653746-xx1	Cache Memory	16MB L3 cache
	Memory	128GB (16x8GB) of PC3-10600R (DDR3-1333) NOTE: 48 DIMM slots.
	Network Controller	HP NC375i Integrated Quad Port Gigabit Server Adapter
	Storage Controller	Embedded HP Smart Array P410i/1G FBWC Controller
	Hard Drives	None ship standard
	Internal Storage	Up to 8TB of internal storage (SFF SAS)
	Optical Drive	None ship standard
	Power Supply	Four 1200W Platinum Power Supplies standard
	Fans	4 Hot plug, redundant fans (individually removable)
	Integrated Lights Out	Integrated Lights-Out 3 (iLO 3) ships standard
	Insight Control	HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates
	Form Factor	4U Rack
	Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.
HP ProLiant DL585 G7 6272 4P 64GB-R Hot Plug SFF 1200W PS Server	Processors	(4) AMD Opteron™ 6272 (2.1GHz/16- core/16MB/115W) Processors
653747-xx1	Cache Memory	16MB L3 cache
	Memory	64GB (8x8GB) of PC3-10600R (DDR3-1333) NOTE: 48 DIMM slots.
	Network Controller	HP NC375i Integrated Quad Port Gigabit Server Adapter
	Storage Controller	Embedded HP Smart Array P410i/1G FBWC Controller
	Hard Drives	None ship standard
	Internal Storage	Up to 8TB of internal storage (SFF SAS)
	Optical Drive	None ship standard
	Power Supply	Four 1200W Platinum Power Supplies standard
	Fans	4 Hot plug, redundant fans (individually removable)
	Integrated Lights Out	Integrated Lights-Out 3 (iLO 3) ships standard
	Insight Control	HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates
	Form Factor	4U Rack
	Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.

HP ProLiant DL585 G7 6344 2P 32GB-R Hot Plug SAS SFF 1200W RPS Server 708686-xx1	Processors Cache Memory Memory Network Controller Storage Controller Hard Drives Internal Storage Optical Drive Power Supply Fans Integrated Lights Out Form Factor Warranty	 (2) AMD Opteron[™] 6344 (2.6GHz/12-core/16MB/115W) Processors 16MB L3 cache 32GB (4x8GB) of PC3-10600R (DDR3-1333) NOTE: 24 DIMM slots. HP Ethernet 1Gb 4-port 331i-SPI Adapter Embedded HP Smart Array P410i Zero Memory Controller None ship standard Up to 8TB of internal storage (SFF SAS) None ship standard Two 1200W Platinum Power Supplies standard 4 Hot plug, redundant fans (individually removable) Integrated Lights-Out 3 (iLO 3) ships standard 4U Rack Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.
HP ProLiant DL585 G7 6238 2P 32GB-R Hot Plug SFF 1200W PS Server 653748-xx1	Processors Cache Memory Memory Network Controller Storage Controller Hard Drives Internal Storage Optical Drive Power Supply Fans Integrated Lights Out Form Factor Warranty	 (2) AMD Opteron[™] 6238 (2.6GHz/12-core/16MB/115W) Processors 16MB L3 cache 32GB (4x8GB) of PC3-10600R (DDR3-1333) NOTE: 24 DIMM slots. HP NC375i Integrated Quad Port Gigabit Server Adapter Embedded HP Smart Array P410i Zero Memory Controller None ship standard Up to 8TB of internal storage (SFF SAS) None ship standard Two 1200W Platinum Power Supplies standard 4 Hot plug, redundant fans (individually removable) Integrated Lights-Out 3 (iLO 3) ships standard 4U Rack Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.

contentsOverviewStandard FeaturesOptional FeaturesService and SupportPre-configured ModelsSmart BuysConfiguration Information - Factory Integrated ModelsCore OptionsAdditional OptionsMemoryStorageTechnical Specifications

Smart Buys

HP ProLiant DL585 G7 6212 4P 64GB-R P410i/512 FBWC SFF 1200W RPS/S-Buy 676482-S01	Processors Cache Memory Memory	 (4) AMD Opteron[™] 6212 (2.60GHz/8-core/16MB/115W) 16MB (1 x 16MB) L3 cache 64GB (8x8GB) of PC3-10600 (DDR3-1333) NOTE: 48 DIMM slots.
070402-301	Network Controller	HP NC375i Integrated Quad Port Gigabit Server Adapter
	Storage Controller	Embedded HP Smart Array P410i/512MB FBWC Controller
	Hard Drives	None ship standard
	Internal Storage	Up to 8TB of internal storage (SFF SAS)
	Optical Drive	None ship standard
	Power Supply	(4)1200W Power Supplies standard
	Fans	4 Hot plug, redundant fans (individually removable)
	Integrated Lights Out	Integrated Lights-Out 3 (iLO 3) ships standard

	Form Factor	4U Rack
	Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.
HP ProLiant DL585 G7	Processors	(4) AMD Opteron™ 6320 (2.8GHz/8-core/16MB/115W)
6320 4P 64GB-R	Cache Memory	16MB (1 x 16MB) L3 cache
P410i/512 FBWC SFF 1200W RPS/S-Buy	Memory	64GB (8x8GB) of PC3-10600 (DDR3-1333) NOTE: 48 DIMM slots.
704163-S01	Network Controller	HP Ethernet 1Gb 4-port 331i-SPI Adapter
	Storage Controller	Embedded HP Smart Array P410i/512MB FBWC Controller
	Hard Drives	None ship standard
	Internal Storage	Up to 8TB of internal storage (SFF SAS)
	Optical Drive	None ship standard
	Power Supply	(4)1200W Platinum Power Supplies standard
	Fans	4 Hot plug, redundant fans (individually removable)
	Integrated Lights Out	Integrated Lights-Out 3 (iLO 3) ships standard
	Insight Control	HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates
	Form Factor	4U Rack
	Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.
<u>contents</u>		
		FeaturesService and SupportPre-configured Modelsctory Integrated ModelsCore OptionsAdditional Options

Memory Storage Technical Specifications

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid
configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales
representative for information on configurable product offerings and requirements.
NOTE: Configure-to-order (CTO) servers must start with a CTO Server.
NOTE: FIO indicates that this option is only available as a factory installable option.
Step 1: Base Configuration

HP Models	HP ProLiant DL585 G7 BC NIC Configure-to-order Server	704963-B21
	Factory Integrated Models ship with:	
	HP Ethernet 1Gb 4-port 331i-SPI Adapter Five standard PCI-express slots HP Smart Array P410i/ Zero Memory Controller Four redundant hot-plug fans SFF SAS/SATA/SSD drive cage HP Integrated Lights-Out 3 (iLO 3) Rack (4U), 7-inch NOTE: Power supplies need to be selected separately from Step 2 below.	
	HP ProLiant DL585 G7 Configure-to-order Server	590480-B21
	Factory Integrated Models ship with:	
	HP NC375i Integrated Quad Port Gigabit Server Adapter Five standard PCI-express slots HP Smart Array P410i/ Zero Memory Controller Four redundant hot-plug fans SFF SAS/SATA/SSD drive cage HP Integrated Lights-Out 3 (iLO 3) management processor: integrated on system board Rack (4U), 7-inch NOTE: Power supplies need to be selected separately from Step 2 below.	

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

otherwise noted)		
HP Processors	NOTE: If more than two processors are desired, select xxxxx-L21 and additional processors would be xxxxx-B21. 3P configurations are not supported	
	Sixteen-Core Processors	
	HP DL585 G7 AMD Opteron™ 6386SE (2.8GHz/16-core/16MB/140W) FIO 2- processor Kit	704173-L21
	HP DL585 G7 AMD Opteron™ 6380 (2.5GHz/16-core/16MB/115W) FIO 2- processor Kit	704175-L21
	HP DL585 G7 AMD Opteron™ 6378 (2.4GHz/16-core/16MB/115W) FIO 2- processor Kit	704177-L21
	HP DL585 G7 AMD Opteron™ 6376 (2.3GHz/16-core/16MB/115W) FIO 2- processor Kit	704179-L21
	HP DL585 G7 AMD Opteron™ 6366HE (1.8GHz/16-core/16MB/85W) FIO 2- processor Kit	704183-L21
	HP DL585 G7 AMD Opteron™ 6284SE (2.7GHz/16-core/16MB/140W) FIO 2- processor Kit	689340-L21
	HP DL585 G7 AMD Opteron™ 6278 (2.4GHz/16-core/16MB/115W) FIO 2- processor Kit	689342-L21
	HP DL585 G7 AMD Opteron™ 6282SE (2.60GHz/16-core/16MB/140W) FIO 2- processor Kit	653976-L21
	HP DL585 G7 AMD Opteron™ 6276 (2.30GHz/16-core/16MB/115W) FIO 2- processor Kit	653978-L21
	HP DL585 G7 AMD Opteron™ 6274 (2.20GHz/16-core/16MB/115W) FIO 2- processor Kit	655514-L21
	HP DL585 G7 AMD Opteron™ 6272 (2.10GHz/16-core/16MB/115W) FIO 2- processor Kit	653980-L21
	HP DL585 G7 AMD Opteron™ 6262HE (1.60GHz/16-core/16MB/85W) FIO 2- processor Kit	655522-L21
	Twelve-Core Processors	
	HP DL585 G7 AMD Opteron™ 6348 (2.8GHz/12-core/16MB/115W) FIO 2- processor Kit	704185-L21
	HP DL585 G7 AMD Opteron™ 6344 (2.6GHz/12-core/16MB/115W) FIO 2- processor Kit	704187-L21
	HP DL585 G7 AMD Opteron™ 6238 (2.60GHz/12-core/16MB/115W) FIO 2- processor Kit	653982-L21
	HP DL585 G7 AMD Opteron™ 6234 (2.40GHz/12-core/16MB/115W) FIO 2- processor Kit	655518-L21
	Eight-Core processors	
	HP DL585 G7 AMD Opteron™ 6328 (3.2GHz/8-core/16MB/115W) FIO 2- processor Kit	704191-L21
	HP DL585 G7 AMD Opteron™ 6320 (2.8GHz/8-core/16MB/115W) FIO 2- processor Kit	704193-L21
	HP DL585 G7 AMD Opteron™ 6220 (3.0GHz/8-core/16MB/115W) FIO 2- processor Kit	655520-L21
	HP DL585 G7 AMD Opteron™ 6212 (2.60GHz/8-core/16MB/115W) FIO 2- processor Kit	655516-L21
	Quad-Core processor	
	HP DL585 G7 AMD Opteron™ 6308 (3.5GHz/4-core/16MB/115W) FIO 2- processor Kit	704195-L21
	HP DL585 G7 AMD Opteron™ 6204 (3.30GHz/4-core/16MB/115W) FIO 2- processor Kit	671816-L21
HP Memory	NOTE: HP Memory selection requires a minimum quantity 2.	
	HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	593907-B21
	HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9	593911-B21

	Memory Kit	
	HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604500-B21
	HP 4GB (1x4GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit	676331-B21
	HP 8GB (1x8GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit	676333-B21
	HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	593913-B21
	HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604502-B21
	HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit	593915-B21
	HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit	627808-B21
	HP 16GB (1x16GB) Dual Rank x4 PC3-12800R (DDR3-1600) Registered CAS- 11 Memory Kit	684066-B21
	HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit	627810-B21
	Load Reduced DIMMs(LRDIMMs)	
	HP 32GB (1x32GB) Quad Rank x4 PC3L-10600L (DDR3-1333) Load Reduced CAS-9 Low Voltage Memory Kit	647885-B21
HP Power Supplies	HP 1200W Common Slot Silver Hot Plug Power Supply Kit	500172-B21
	HP 1200W Common Slot Platinum Hot Plug Power Supply Kit	578322-B21
	NOTE: Option Kit contains optional power supply, an IEC power cable and PDU IEC cables.	
	NOTE: HP ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HP power cords please go to www.hp.com/products/powercords	

Step 3: Choose Additional Factory Integratable Options (only one of the following from each list unless otherwise noted)

HP Storage Controllers	HP Smart Array P212/256 BBWC 1-ports Int/1-ports Ext PCIe x8 FIO SAS Controller	491191-B21
HP Insight Software	HP Smart Array P411/256 BBWC 2-ports Ext PCIe x8 FIO SAS Controller HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single	491193-B21 C6N36A
-	Server FIO License	

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below. *contents* Overview Standard Features Optional Features Service and Support Pre-configured Models Smart Buys Configuration Information - Factory Integrated Models Core Options Additional Options Memory Storage Technical Specifications

Core Options

 NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP

 recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

 HP Unique Options
 HP DL585 G7 PCI-E Riser v2 Option Kit
 659805-B21

 NOTE: Adds 2 PCI-E 2.0 x16, 4 PCI-E 2.0 x8.
 NOTE: v2 recommended for AMD Opteron 6200 processor configurations.
 659807-B21

 HP DL585 G7 PCI-E/X Riser v2 Option Kit
 659807-B21

 NOTE: Adds 1 PCI-E 2.0 x16, 2 PCI-E 2.0 x8, 1 PCI-E 2.0 x4, 2 PCI-X.
 659807-B21

 NOTE: v2 recommended for AMD Opteron 6200 processor configurations.
 659807-B21

HP Processors	NOTE: Processor kits contain two processors each.	
	Sixteen Core Processors	
	HP DL585 G7 AMD Opteron™ 6386SE (2.8GHz/16-core/16MB/140W) 2- processor Kit	704173-B2 ⁻
	HP DL585 G7 AMD Opteron™ 6380 (2.5GHz/16-core/16MB/115W) 2-processor Kit	704175-B2 ⁻
	HP DL585 G7 AMD Opteron™ 6378 (2.4GHz/16-core/16MB/115W) 2-processor Kit	704177-B2 ⁻
	HP DL585 G7 AMD Opteron™ 6376 (2.3GHz/16-core/16MB/115W) 2-processor Kit	704179-B2 ⁻
	HP DL585 G7 AMD Opteron™ 6366HE (1.8GHz/16-core/16MB/85W) 2- processor Kit	704183-B2
	HP DL585 G7 AMD Opteron™ 6284SE (2.7GHz/16-core/16MB/140W) 2- processor Kit	689340-B2
	HP DL585 G7 AMD Opteron™ 6278 (2.4GHz/16-core/16MB/115W) 2-processor Kit	689342-B2
	HP DL585 G7 AMD Opteron™ 6282SE (2.60GHz/16-core/16MB/140W) 2- processor Kit	653976-B2 ⁻
	HP DL585 G7 AMD Opteron™ 6276 (2.30GHz/16-core/16MB/115W) 2- processor Kit	653978-B2 ⁻
	HP DL585 G7 AMD Opteron™ 6274 (2.20GHz/16-core/16MB/115W) 2- processor Kit	655514-B2
	HP DL585 G7 AMD Opteron™ 6272 (2.10GHz/16-core/16MB/115W) 2- processor Kit	653980-B2
	HP DL585 G7 AMD Opteron™ 6262HE (1.60GHz/16-core/16MB/85W) 2- processor Kit	655522-B2
	Twelve-Core Processors	
	HP DL585 G7 AMD Opteron™ 6348 (2.8GHz/12-core/16MB/115W) 2-processor Kit	704185-B2 ⁻
	HP DL585 G7 AMD Opteron™ 6344 (2.6GHz/12-core/16MB/115W) 2-processor Kit	704187-B2
	HP DL585 G7 AMD Opteron™ 6238 (2.60GHz/12-core/16MB/115W) 2- processor Kit	653982-B2
	HP DL585 G7 AMD Opteron™ 6234 (2.40GHz/12-core/16MB/115W) 2- processor Kit	655518-B2
	HP DL585 G7 AMD Opteron™ 6180SE (2.5GHz/12-core/12MB/140W) 2- processor Kit	633965-B2
	HP DL585 G7 AMD Opteron™ 6176SE (2.3GHz/12-core/12MB/140W) 2- processor Kit	601351-B2
	HP DL585 G7 AMD Opteron™ 6176 (2.3GHz/12-core/12MB/115W) 2-processor Kit	633967-B2
	HP DL585 G7 AMD Opteron™ 6174 (2.2GHz/12-core/12MB/115W) 2-processor Kit	601353-B2
	HP DL585 G7 AMD Opteron™ 6172 (2.1GHz/12-core/12MB/115W) 2-processor Kit	583109-B2
	HP DL585 G7 AMD Opteron™ 6168 (1.9GHz/12-core/12MB/115W) 2-processor Kit	583106-B2
	HP DL585 G7 AMD Opteron™ 6166HE (1.8GHz/12-core/12MB/85W) 2- processor Kit	633971-B2
	HP DL585 G7 AMD Opteron™ 6164HE (1.7GHz/12-core/12MB/85W) 2- processor Kit	601357-B2 ⁻
	Eight-Core Processors	
	HP DL585 G7 AMD Opteron™ 6328 (3.2GHz/8-core/16MB/115W) 2-processor Kit	704191-B21
	HP DL585 G7 AMD Opteron™ 6320 (2.8GHz/8-core/16MB/115W) 2-processor	704193-B2 ⁻

	Kit	
	HP DL585 G7 AMD Opteron™ 6220 (3.0GHz/8-core/16MB/115W) 2-processor Kit	655520-B21
	HP DL585 G7 AMD Opteron™ 6212 (2.60GHz/8-core/16MB/115W) 2-processor Kit	655516-B21
	HP DL585 G7 AMD Opteron™ 6140 (2.6GHz/8-core/12MB/115W) 2-processor Kit	633969-B21
	HP DL585 G7 AMD Opteron™ 6136 (2.4GHz/8-core/12MB/115W) 2-processor Kit	601355-B21
	HP DL585 G7 AMD Opteron™ 6128 (2.0GHz/8-core/12MB/115W) 2-processor Kit	583103-B21
	HP DL585 G7 AMD Opteron™ 6132HE (2.2GHz/8-core/12MB/85W) 2- processor Kit	633973-B21
	Quad-Core processor	
	HP DL585 G7 AMD Opteron™ 6308 (3.5GHz/4-core/16MB/115W) 2-processor Kit	704195-B21
	HP DL585 G7 AMD Opteron™ 6204 (3.30GHz/4-core/16MB/115W) 2-processor Kit	671816-B21
HP Memory	NOTE: DIMM banks are active only when the corresponding processor socket is populated.	
	NOTE: Memory must be installed in like-pairs, i.e. two of the same size.	
	Registered DIMMs (RDIMMs)	500007 D01
	HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	593907-B21
	HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit S-Buy	593907-S21
	HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	593911-B21
	HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit S-Buy	593911-S21
	HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604500-B21
	HP 4GB (1x4GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit	676331-B21
	HP 8GB (1x8GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit	676333-B21
	HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	593913-B21
	HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit S-Buy	593913-S21
	HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604502-B21
	HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit	593915-B21
	HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit S-Buy	593915-S21
	HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit	627808-B21
	HP 16GB (1x16GB) Dual Rank x4 PC3-12800R (DDR3-1600) Registered CAS- 11 Memory Kit	684066-B21
	HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit	627810-B21
	Load Reduced DIMMs(LRDIMMs)	
	HP 32GB (1x32GB) Quad Rank x4 PC3L-10600L (DDR3-1333) Load Reduced CAS-9 Low Voltage Memory Kit	647885-B21
	Load Reduced DIMMs(LRDIMMs)	
	HP 32GB (1x32GB) Quad Rank x4 PC3L-10600L (DDR3-1333) Load Reduced	647885-B21

	CAS-9 Low Voltage Memory Kit Upgrade Options	
	HP DL585 G7 CPU Memory Secondary Upgrade Option NOTE: Adds processor sockets 3 and 4 and associated DIMM slots.	590489-B21
HP Optical Drives	NOTE: Optical drives are ejectable.	
	HP Slim 12.7mm SATA DVD-ROM Optical Drive	481041-B21
	HP Slim 12.7mm SATA DVD-RW Optical Drive	481043-B21
HP Hard Drives	 NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components. NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details. 	
	SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives	
	HP 1.2TB 6G SAS 10K SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	693648-B21
	HP 900GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	619291-B21
	HP 600GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581286-B21
	HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581284-B21
	HP 300GB 6G SAS 15K rpm SFF (2.5-inch) Hot Plug Enterprise 3 yr Warranty Hard Drive	627117-B21
	HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	507127-B21
	HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21
	SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives	
	HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	
	HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12244_na/12244_na.html	
	(Worldwide)	
	SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives	
	HP 1TB 3G SATA 7.2K rpm SFF (2.5-inch) Hot Plug Midline 1yr Warranty Hard Drive	625609-B21
	HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive	507750-B21
	NOTE: SATA drives have a 1 year warranty. Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13021_na/13021_na.html (Worldwide)	
	6G SAS ME Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Driveses	
	HP 800GB 6G SAS Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Warranty Solid State Drive	690823-B21
	HP 400GB 6G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream 3yr Warranty Solid State Drive	690821-B21
	HP 200GB 6G SAS Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Warranty Solid State Drive	690819-B21
	3G SATA MLC Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives	
	HP 400GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty	636597-B21

	Solid State Drive	
	HP 200GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid 6G SAS SLC Hot Plug Enterprise Performance Solid State DrivesState Drive	636595-B21
	HP 100GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive	636593-B21
	6G SAS SLC Hot Plug Enterprise Performance Solid State Drives	
	HP 400GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive	632494-B21
	HP 200GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive	632492-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/14038_na/14038_na.html (Worldwide)	
HP Networking	Gigabit Ethernet adapters	
	HP NC112T PCI Express Gigabit Server Adapter	503746-B21
	HP NC360T PCI-E Dual Port Gigabit Server Adapter	412648-B21
	HP NC365T 4-port Ethernet Server Adapter	593722-B21
	HP NC373F PCI-E Multifunction 1000SX Gigabit Svr Adapter	394793-B21
	HP NC373T PCI-E Multifunction Gigabit Server Adapter	394791-B21
	HP NC375T PCI Express Quad Port Gigabit Server Adapter	538696-B21
	HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter	458492-B21
	HP Ethernet 1Gb 4-port 331T Adapter	647594-B21
	HP Ethernet 1Gb 2-port 361T Adapter	652497-B21
	HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
	10 Gigabit Ethernet adapters NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per	
	each adapter. NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.	
	HP NC522SFP Dual Port 10GbE Gigabit Server Adapter	468332-B21
	HP NC523SFP 10Gb 2-port Server Adapter	593717-B21
	HP NC524SFP Dual Port 10GbE Module	489892-B21
	HP Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
	HP Ethernet 10Gb 2-port 530T Adapter	656596-B21
	HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
	HP NC550SFP Dual Port 10GbE Server Adapter	581201-B21
	HP NC552SFP 10Gb 2-port Ethernet Server Adapter	614203-B21
	HP 10 GbE PCI-e G2 Dual Port Network Interface Card	516937-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs.	
HP InfiniBand	HP InfiniBand 4X QDR ConnectX-2 PCIe G2 Dual Port HCA	592520-B21
	HP InfiniBand 4X DDR ConnectX-2 PCIe G2 Dual Port HCA	592521-B21
	QLogic InfiniBand 4X QDR PCI-E G2 Dual Port HCA	583211-B21
	HP InfiniBand FDR/EN 10/40Gb Dual Port 544QSFP Adapter	649281-B21
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/13078_na/13078_na.html	
HP I/O Expansion	HP DL585 G7 PCI-E Riser Card	590485-B21
Options	HP DL585 G7 PCI-E Riser v2 Option Kit NOTE: Adds 2 PCI-E 2.0 x16, 4 PCI-E 2.0 x8. NOTE: v2 recommended for AMD Opteron 6200 processor configurations.	659805-B21
	HP DL585 G7 PCI-E/X Riser v2 Option Kit	659807-B21

	NOTE: Adds 1 PCI-E 2.0 x16, 2 PCI-E 2.0 x8, 1 PCI-E 2.0 x4, 2 PCI-X. NOTE: v2 recommended for AMD Opteron 6200 processor configurations.
HP Power Supplies	NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor.
	HP 1200W Common Slot Silver Hot Plug Power Supply Kit 500172-B
	HP 1200W Common Slot Platinum Hot Plug Power Supply Kit 578322-B
	NOTE: Option Kits contains optional power supply, an IEC power cable and PDU IEC cables. NOTE: HP ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HP power cords please go to www.hp.com/products/powercords
<u>contents</u>	
Overview Standa	ard Features Optional Features Service and Support Pre-configured Models
Smart Buys Con Memory Storage	figuration Information - Factory Integrated Models Core Options Additional Options • Technical Specifications

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Insight Software	HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License	C6N27A
	HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License	C6N28AAE
	HP Insight Control Server Provisioning Media Kit	BD883A
	HP Insight Management Media Kit	C6N31A
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Electronic License	C6N36AAE
	HP Insight Control Server Deployment including 1yr 24x7 Support Electronic License	T9082AAE
	HP Insight Control Server Deployment including 1yr 24x7 Support Single Server License	452151-B21
	NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.	
	NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.	
	NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates.	
	NOTE: For additional license options please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_na/12631_na.html	
	HP Integrated Lights-Out (iLO) Advanced for ProLiant	
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Electronic License	TA850AAE
	HP iLO Advanced Electronic License with 3yr 24x7 Tech Support and Updates	BD506AAE
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License	512485-B21
	HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates	BD505A
	NOTE: For additional license options please see the QuickSpecs at:	
	http://h18004.www1.hp.com/products/quickspecs/14276_na/14276_na.html	
	NOTE: For more information, visit: http://www.hp.com/go/ilo	
P		

High Performance	HP Cluster Management Utility	
Clusters	HP Insight Cluster Management Utility 1yr 24x7 Flexible License	QL803B
	HP Insight Cluster Management Utility 3yr 24x7 Flexible License NOTE: These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.	BD476A
	HP Insight Cluster Management Utility Media	BD477A
	NOTE: For additional license kits please see the QuickSpecs at: http://h18004.www1.hp.com/products/quickspecs/12612_na/12612_na.html	
	HP HPC Linux Value Pack	
	HP High Performance Computing Linux Value Pack 1 Processor Flexible License for ProLiant Servers NOTE: This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one socket (a.k.a. processor). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.	TC293B
	HP High Performance Computing Linux Value Pack Media Kit for ProLiant	TC294A
	Servers NOTE: This part number can be used to purchase media including software and documentation, which will be delivered to the customer.	
	NOTE: For additional license kits please see the QuickSpecs at:	
	http://h18004.www1.hp.com/products/quickspecs/13485_na/13485_na.html	
HP Graphics Options	HP DL580/DL585/DL980 G7 Power Cable Kit NOTE: The HP ProLiant DL585 G7 can support up to 4 (225W) or 3 (300W)	631660-B21
	Graphic Cards and/or GPGPU Accelerator Options. NOTE: An option kit will be required per Graphic Card and/or GPGPU Accelerator Options. NOTE: Depending on the number of GPGPUs required, customers will need to purchase one of the following I/O expansion boards: HP DL585G7 PCI-E Riser v2 Option Kit PN: 659805-B21 (Adds 2 PCI-E 2.0 x16, 4 PCI-E 2.0 x8. OR the HP DL585G7 PCI-E/X Riser v2 Option Kit: PN: 659807-B21 (Adds 1 PCI-E 2.0 x16, 2 PCI-E 2.0 x8, 1 PCI-E 2.0 x4, 2 PCI-X).	
HP I/O Accelerator	Second Generation Accelerators	
Options	HP 365GB Multi Level Cell G2 PCIe ioDrive2 for ProLiant Servers	673642-B21
	HP 785GB Multi Level Cell G2 PCIe ioDrive2 for ProLiant Servers	673644-B21
	HP 1205GB Multi Level Cell G2 PCIe ioDrive2 for ProLiant Servers	673646-B21
	HP 2410GB Multi Level Cell G2 PCIe ioDrive2 Duo for ProLiant Servers	673648-B21
	First Generation Accelerators	
	HP 160GB Single Level Cell PCIe ioDrive for ProLiant Servers NOTE: A low-profile PCI bracket is included for use in low-profile slots.	600278-B21
	HP 320GB Single Level Cell PCIe ioDrive Duo for ProLiant Servers	600281-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13587_na/13587_na.html	
HP Security	HP Trusted Platform Module Option NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker [™] Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running	488069-B21

Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM. **NOTE:** ProLiant OS pre-installed units will come with the partition required for TPM deployment. **NOTE:** The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

HP Storage Controllers SAS Controllers

Smart Array P212 Controller

HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller	462828-B21
HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 SAS Controller	462834-B21
Smart Array P410 Controller	
HP Smart Array P410/256 2-ports Int PCIe x8 SAS Controller	462862-B21
HP Smart Array P410/512 BBWC 2-ports Int PCIe x8 SAS Controller	462864-B21
HP Smart Array P410/512 FBWC 2-ports Int PCIe x8 SAS Controller	578230-B21
HP Smart Array P410/1G FBWC 2-ports Int PCIe x8 SAS Controller	572532-B21
Smart Array P411 Controller	
HP Smart Array P411/256 2-ports Ext PCIe x8 SAS Controller	462830-B21
HP Smart Array P411/512 BBWC 2-ports Ext PCIe x8 SAS Controller	462832-B21
HP Smart Array P411/512 FBWC 2-ports Ext PCIe x8 SAS Controller	578229-B21
HP Smart Array P411/1G FBWC 2-ports Ext PCIe x8 SAS Controller	572531-B21
Smart Array P812 Controller	
HP Smart Array P812/1G FBWC 2-ports Int/4-ports Ext PCIe x8 SAS Controller	487204-B21
Optional Upgrades	
HP 512MB P-Series Battery Backed Write Cache Upgrade	462967-B21
NOTE: Supported on HP Smart Array P411 Controller only.	
HP 512MB Flash Backed Write Cache	534916-B21
HP 256MB P-series Cache Upgrade	462968-B21
HP 1GB Flash Backed Cache	534562-B21
HP Smart Array Advanced Pack including 1yr 24x7 Technical Support and	516471-B21
Updates Single Server License NOTE: This part number can be used to purchase a single license or to order	
multiple licenses with a single activation key. Customers will receive a license	
entitlement certificate via e-mail. The license entitlement certificate must be	
redeemed online or via fax in order to obtain the license activation key(s).	
Include one year of 24x7 HP Software Technical Support Services.	
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18000.www1.hp.com/products/quickspecs/13203_na/13203_na.html	
(Smart Array P212 Controller)	
http://h18000.www1.hp.com/products/quickspecs/13201_na/13201_na.html	
(Smart Array P410 Controller) http://h18000.www1.hp.com/products/quickspecs/13202 na/13202 na.html	
(Smart Array P411 Controller)	
http://h18000.www1.hp.com/products/quickspecs/13558_na/13558_na.html	
(Smart Array P812 Controller) http://h18000.www1.hp.com/products/quickspecs/13200 na/13200 na.html	
(Smart Array Advanced Pack)	
SAS HBA	
HP Modular Smart Array SC08e 2-ports Ext PCIe x8 SAS Host Bus Adapter	614988-B21
NOTE: This is a 2 x4 External Port HBA	01.000 221
NOTE: This is only approved for the HP P2000 G3 SAS Modular Smart Array.	
NOTE: Please see the QuickSpecs for Technical Specifications and additional	
information:	
http://h18004.www1.hp.com/products/quickspecs/13651_na/13651_na.html (SC08e 6Gb HBA)	
SCSI HBA	

	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter NOTE: Recommended HBA for SCSI tape drive connect.	412911-B21
	NOTE: Please see the following QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/12566_na/12566_na.html (SC11Xe HBA)	
	NOTE: Please refer to the HBA QuickSpecs for additional information at: http://www.hp.com/products/hba.	
HP Tape Backup	NOTE: For the complete range of tape drives, autoloaders, libraries and media see: http://www.hp.com/go/tape. For hardware and software compatibility of HP tape backup products see: http://www.hp.com/storage/SPOCK.	
	NOTE: Connection using HP Smart Array P212/Zero Memory Controller (PN 462828-B21) recommended. NOTE: For Internal drives to be connected to DL servers please make sure that	
	you order rack mount kit as well.	
	HP StoreEver LTO-5 Ultrium 3280 SAS Internal Tape Drive NOTE: For installation into 3U SAS rack kit (AG576B). No peripheral bay available for installation into the server.	EH899B
	HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit	C0L99A
	HP StoreEver LTO-6 Ultrium 6650 Internal Tape Drive	EH963A
	HP StoreEver LTO-6 Ultrium 6650 External Tape Drive	EH964A
	HP StoreEver LTO-6 Ultrium 6250 Internal Tape Drive	EH969A
	HP StoreEver LTO-6 Ultrium 6250 External Tape Drive	EH970A
HP Disk Backup	NOTE: For the complete range of D2D Backup Systems see: http://www.hp.com/go/d2d. For the complete range of RDX drives and media see: http://www.hp.com/go/rdx. For hardware and software compatibility of HP	
	disk backup products see: http://www.hp.com/storage/SPOCK.	
	HP D2D Backup Systems with Backup Data Deduplication	
	HP StoreOnce D2D2504i Backup System	EJ002C
	HP StoreOnce D2D4112 Backup System	EH993C
	HP RDX Removable Disk Backup Systems USB	
	NOTE: For installation into 1U USB Rack-Mount Kit (A8007A). No peripheral bay	
	available for drive installation into the server.	
	HP RDX1000 USB3.0 Internal Disk Backup System	B7B67A
	HP RDX500 USB3.0 Internal Disk Backup System	B7B64A
	HP StoreOnce Backup systems	
	HP StoreOnce 2620 iSCSI Backup HP StoreOnce 4220 Backup	BB852A BB855A
HP Storage Options	Storage Fibre Channel HBA	
nr Storage Options	NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see:	
	http://h18006.www1.hp.com/storage/saninfrastructure/hba.html	
	Brocade Fibre Channel HBAs	
	HP 41B 4Gb 1-port PCIe Fibre Channel Host Bus Adapter	AP767B
	HP 42B 4Gb 2-port PCIe Fibre Channel Host Bus Adapter	AP768B
	HP 82B 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AP770B
	HP 81B 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AP769B
	Emulex Fibre Channel HBAs	
	HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AJ762B
	HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ763B
	HP FC2142SR 4Gb 1-port PCIe Fibre Channel Host Bus Adapter	A8002B
	HP FC2242SR 4Gb 2-port PCIe Fibre Channel Host Bus Adapter	A8003B
	HP SN1000E 16Gb 2-port PCIe Fibre Channel Host Bus Adapter NOTE: If selected, this card should not be populated in slots 1, 4, 7 or 11; a max of 7 cards can be installed.	QR559A

	HP SN1000E 16Gb 1-port PCIe Fibre Channel Host Bus Adapter NOTE: If selected, this card should not be populated in slots 1, 4, 7 or 11; a max of 7 cards can be installed.	QR558A				
	QLogic Fibre Channel HBAs					
	HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AK344A				
	HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter HP FC1142SR 4Gb 1-port PCIe Fibre Channel Host Bus Adapter HP FC1242SR 4Gb 2-port PCIe Fibre Channel Host Bus Adapter					
	HP FC1242SR 4Gb 2-port PCIe Fibre Channel Host Bus Adapter	AE312A				
	Converged Network Adapter					
	HP CN1100E Dual Port Converged Network Adapter	BK835A				
	HP CN1000Q Dual Port Converged Network Adapter	BS668A				
	HP CN1000E Dual Port Converged Network Adapter	AW520B				
HP Disk Storage	Disk Enclosures					
Systems	HP D2600 Disk Enclosure	AJ940A				
	HP D2700 Disk Enclosure	AJ941A				
	NOTE: Please see the QuickSpecs for additional options and configuration					
	information at:					
	http://h18000.www1.hp.com/products/quickspecs/13404_na/13404_na.html (Worldwide)					
HP Uninterruptible	HP Rack-mountable UPS					
Power Systems	HP R1500 G3 Uninterruptible Power Supply (UPS)					
	HP R1.5kVA G3 1U Uninterruptible Power System	AF469A				
	NOTE: Please see the QuickSpecs for additional information:					
	http://h18000.www1.hp.com/products/quickspecs/14059_na/14059_na.html					
	HP R/T3000 G2 Uninterruptible Power System (UPS)					
	HP R/T3000 G2 2U L530 Low Voltage Uninterruptible Power System	AF466A				
	HP R/T3000 G2 2U L620 High Voltage Uninterruptible Power System	AF467A				
	NOTE: Please see the QuickSpecs for additional information:					
	http://h18000.www1.hp.com/products/quickspecs/14058_na/14058_na.html					
	R5000 Uninterruptible Power System (UPS)					
	HP R5KVA 3U L630 High Voltage Uninterruptible Power System	AF460A				
	NOTE: Please see the QuickSpecs for additional information:					
	http://h18000.www1.hp.com/products/quickspecs/14109_na/14109_na.html					
	R7000 Uninterruptible Power System (UPS)					
	HP R7KVA 4U 50A High Voltage Uninterruptible Power System	AF462A				
	HP R5KVA and R7KVA 3U Extended Runtime Module	AF464A				
	NOTE: Please see the QuickSpecs for additional information:					
	http://h18000.www1.hp.com/products/quickspecs/14110_na/14110_na.html					
	HP Rackmountable 3 Phase Uninterruptible Power Systems (UPS R8000/3 and R12000/3)					
	HP R8000/3 8000kVA Three Phase NA 6U Rackmount Uninterruptible Power System	AF431A				
	HP R12000/3 12000VA Three Phase NA 6U Rackmount Uninterruptible Power System	AF429A				
	NOTE: Please see the QuickSpecs for additional information:					
	http://h18000.www1.hp.com/products/quickspecs/12857_na/12857_na.html					
	NOTE: For additional information on HP Uninterruptible Power Systems please					
	go to: www.hp.com/servers/rackups.					
	NOTE: For additional information on sizing your server, please reference: http://www.upssizer.com.					
	NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection					

	Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.					
HP Power Distribution	HP Monitored Power Distribution Unit: Half Rack Version					
Units	HP 4.9kVA 24A Single Input Single Phase Monitored Power Distribution Unit					
	HP Monitored Power Distribution Unit: Full Rack Version					
	HP 8.6kVA 24A Single Input Three Phase Monitored Power Distribution Unit	AF504A				
	HP 16.6kVA 40A Dual Input Single Phase NA/JP Monitored Power Distribution Unit	AF505A				
	HP 8.3kVA 40A Single Input Single Phase Monitored Power Distribution Unit Modular Power Distribution Units 1U/0U (Up to 32 outlets) NOTE: 1U/0U mounting brackets shipped with the unit (optimized for 10000 and 9000 series racks).	AF506A				
	HP 4.9kVA 24A High Voltage Modular Power Distribution Unit	252663-D72				
	HP 8.3kVA 40A High Voltage Modular Power Distribution Unit	252663-D73				
	HP 2.8kVA 24A Low Voltage NA/JP Modular Power Distribution Unit	252663-D71				
	NOTE: For additional information on HP Power Distribution Units including	232003-071				
	accessories please go to: www.hp.com/go/pdu. Note: Additional HP Power Distribution Units are available. For a complete list of all HP PDUs and additional information please visit: www.hp.com/go/rackandpower NOTE: Please see the UPS and PDU cable matrix's on the HP Power					
	Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.					
HP Intelligent Power	iPDU Core Units					
Distribution Units (iPDU)	HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF520A				
	HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF521A				
	HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF522A				
	HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit	AF533A				
	HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF523A				
	HP 11.4kVA 16A 415V Three Phase L22-20 NA Core Intelligent Power Distribution Unit	AF900A				
	HP 17.3kVA 24A 415V Three Phase L22-30 NA Core Intelligent Power Distribution Unit	AF902A				
	HP 17.3kVA 24A 415V Three Phase IEC309 NA Core Intelligent Power Distribution Unit	AF901A				
	HP 7.3kVA 32A Single Phase INTL Core Intelligent Modular Power Distribution Unit	AF525A				
	HP 11kVA 16A Three Phase INTL Core Intelligent Modular Power Distribution Unit	AF526A				
	HP 22kVA 32A Three Phase INTL Core Intelligent Modular Power Distribution Unit	AF527A				
	HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF535A				
	HP 17.3kVA 24A 415V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF537A				
	HP 22kVA 32A 400V Three Phase 12 Outlet Core INTL Intelligent Power Distribution Unit	AF538A				
	iPDU Extension Bars					

	HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar HP 5xC13 Intelligent PDU Extension Bar G2 Kit NOTE: Additional HP Power Distribution Units are available. For a complete list of all HP PDUs and additional information please visit: www.hp.com/go/rackandpower	AF528A AF547A
HP Basic Power Distribution Units	HP 1.9kVA 120 Volt 12 Outlet NA/JP Basic Power Distribution Unit HP 2.8kVA 120 Volt 18 Outlet NA/JP Basic Power Distribution Unit	H5M54A H5M55A
	HP 3.6kVA 200-240 Volt 12 Outlet WW Basic Power Distribution Unit	H5M56A
	HP 3.6kVA 200-240 Volt 20 Outlet WW Basic Power Distribution Unit	H5M57A
	HP 4.9kVA 200-240 Volt 20 Outlet NA/JP Basic Power Distribution Unit	H5M58A
	HP 4.9kVA 208 Volt 20 Outlet NA/JP Basic Power Distribution Unit	H5M59A
	HP 8.3kVA 208 Volt 36 Outlet NA/JP Basic Power Distribution Unit	H5M60A
	HP 8.6kVA 208 Volt 30 Outlet 14/31 Basic Fower Distribution Onit HP 8.6kVA 208 Volt Three Phase 18 Outlet NA/JP Basic Power Distribution Unit	H5M61A
	HP 8.6kVA 208 Volt Three Phase 30 Outlet NA/JP Basic Power Distribution Unit	H5M62A
	HP 5.7kVA 208 Volt Three Phase 27 Outlet NA/JP Dual Voltage Basic Power Distribution Unit	H5M63A
	HP 8.6kVA 208 Volt Three Phase 30 Outlet NA/JP Dual Voltage Basic Power Distribution Unit	H5M64A
	HP 11kVA 400 Volt Three Phase 42 Outlet NA Basic Power Distribution Unit	H5M67A
	HP 7.3kVA 230 Volt 20 Outlet INTL Basic Power Distribution Unit	H5M68A
	HP 7.3kVA 230 Volt 30 Outlet INTL Basic Power Distribution Unit	H5M70A
	HP 11kVA 230 Volt 36 Outlet INTL Basic Power Distribution Unit	H5M71A
	HP 11kVA 400 Volt Three Phase 30 Outlet INTL Basic Power Distribution Unit	H5M724
	HP 11kVA 400 Volt Three Phase 42 Outlet INTL Basic Power Distribution Unit	H5M73A
	HP Hardwired 200-240 Volt 36 Outlet WW Basic Power Distribution Unit	H5M75A
	HP 13.2kVA 480 Volt Three Phase 15 Outlet NA Basic Power Distribution Unit	H3X07A
	HP 19.9kVA 480 Volt Three Phase 30 Outlet NA Basic Power Distribution Unit	H3X08A
	HP 277 Volt options for H3X07A and H3X08A	
	HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer NOTE: Please see the QuickSpecs for Technical Specifications and additional	H3X09A
	information: http://h18000.www1.hp.com/products/quickspecs/14557_na/14557_na.html	
	(Worldwide) NOTE: Additional HP Power Distribution Units are available. For a complete list of all HP PDUs and additional information please visit	
	www.hp.com/go/rackandpower.	
HP Rack Options	HP TFT7600 G2 KVM Console and Monitor (TFT7600 G2)	4 7070 4
	HP TFT7600 G2 KVM Console Rackmount Keyboard US Monitor	AZ870A
	HP TFT7600 G2 KVM Console Rackmount Keyboard US TAA Monitor	AZ885A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13731_na/13731_na.html	
	HP 1U Rackmount Keyboard with USB	
	HP 1U US Rackmount Keyboard with USB	AG072A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://h18000.www1.hp.com/products/quickspecs/12465_na/12465_na.html	
	HP Server Console Switches	
	HP Server Console 0x2x8 Port Analog Switch	AF616A
	HP Server Console 0x2x16 Port Analog Switch	AF6174
	HP TAA 0x2x16xKVM Server Console G2 Switch NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	AF626A

	http://h18000.www1.hp.com/products/quickspecs/11834_na/11834_na.html	
	(Worldwide)	
	HP Server Console Switch G2 with Virtual Media & CAC	
	HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
	HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF619A
	HP KVM CAT5 1-pack USB Interface Adapter	336047-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://h18000.www1.hp.com/products/quickspecs/13475_na/13475_na.html (Worldwide)	
	HP IP Console Switch G2 with Virtual Media & CAC	
	HP 1x4 USB/PS2 KVM Console Switch	AF611A
	HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
	HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
	HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://h18000.www1.hp.com/products/quickspecs/13474_na/13474_na.html (Worldwide)	
HP USB and SD	HP Flash Media Kits for USB Drives	
Options	HP 2GB USB Flash Media Drive Key Kit NOTE: HP qualified blank USB key for use with HP ProLiant servers that support the VMware virtualization environment and other HP value-add software like SmartStart. HP recommends this industry standard USB flash device for use with VMware ESXi. USB device must be installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to HP VMware Getting Started Guide for installation instructions.	
	HP Enterprise Performance Flash Media Kits for Memory Cards	
	HP 4GB SD Enterprise Performance Flash Media Kit NOTE: Blank SD media device is supported for use with VMware and Citrix. SD media must be installed in the internal slot of the ProLiant server. Learn more at: http://www.hp.com/go/proliantvirtualization.	
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://h18000.www1.hp.com/products/quickspecs/13971_na/13971_na.html	
	Other USB and SD Options	
	HP USB 2-Button Optical Scroll Mouse	
	HP USB 04 Standard Keyboard	

HP Care Pack Services Proactive Care

NOTE: Collaborative Support plus Proactive services delivered by the onshore, local language Advanced Solution Center (ASC), end-to-end case ownership from a Technical Solution Specialists and Technical Account Manager who remotely delivers firmware/software revision management, proactive scans and incident trend reports. Recommended for customers running a virtualized infrastructure and/or customers who desire an enhanced call support experience. HP 3 year 4 hour 24x7 ProLiant DL58x Proactive Care Service U2Z68E HP 3 year 4 hour 24x7 with Defective Media Retention ProLiant DL58x U2Z71E **Proactive Care Service** HP 3 year 6 hour Call To Repair 24x7 ProLiant DL58x Proactive Care Service U2Z74E HP 3 year 6 hour Call To Repair 24x7 withDefective Media Retention ProLiant U2Z77E DL58x Proactive Care SVC HP 3 year 4 hour 24x7 ProLiant DL58x Proactive Care Service U2Z68E **Collaborative Support** NOTE: Hardware break/fix plus 24x7 software diagnosis support with collaborative call management for a broad spectrum of 3rd Party software

products including O/S and hypervisors. Recommended for c procuring 3rd party SW O/S and hypervisors from the softwa and deploying them on HP ProLiant servers.	
HP 3 year 4 hour 24x7 ProLiant DL58x Collaborative Support	U1J48E
HP 3 year 4 hour 24x7 with Defective Media Retention ProLia Collaborative Support	ant DL58x U1J51E
HP 3 year 6 hour Call To Repair 24x7 ProLiant DL58x Collab	orative Support U1J54E
HP 3 year 6hr Call To Repair 24x7 withDefective Media Rete DL58x Collaborative Support	ntion ProLiant U1J57E
Proactive Care Personalized Support Option	
NOTE: To add an onsite Account Support Manager (ASM) to	Proactive Care.
ASM is an assigned resource who delivers support planning technical expertise and best practices advices for the custor	
HP 3 year ISS ProactiveCare Personalized Support	U6W98E
Installation Services	
NOTE: Reduce the time required to get your system up and minimize disruptions to your business.	running and help
HP 3 year 4 hour 24x7 ProLiant D58x Hardware Support	U4608E
HP Install ProLiant DL58x Service	U4617E
HP Startup ProLiant DL58x Service	U4618E
HP Installation and Startup for Insight Control Server Deployn Rapid Deployment Pack	ment - previously U5683E
NOTE: For more information, customer/resellers can contact	:
http://www.hp.com/services/carepack	
Standard Features Optional Features Service and Support	Pre-configured Models
Configuration Information - Factory Integrated Models Core	Options Additional Options
Storage Technical Specifications	

Memory

Overview Smart Buys Memory

NOTE: Standard memory configurations listed do not apply to "Factory Integrated Models." HP ProLiant DL585 G7 Models Memory Configurations

- This server supports DDR3 2GB, 4GB, 8GB, 16GB and 32GB memory modules across 48 memory sockets.
- For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator

Advanced ECC memory

- Advanced ECC memory is the memory protection mode for this server. In Advanced ECC, the server does not fail because of correctable memory errors. The server provides notification if the level of correctable errors exceeds a pre-defined threshold rate.
- Advanced ECC provides additional protection over standard ECC because it is possible to correct certain memory errors that would otherwise be uncorrectable and result in a server failure.
- Whereas standard ECC can correct single-bit memory errors, Advanced ECC can correct single-bit memory errors and multi-bit memory errors if all failed bits are on the same DRAM device on the memory module.

Online Spare memory

Online Spare memory mode is a higher level of memory protection that complements Standard Memory mode with Advanced ECC. With Online Spare mode, a DIMM with a rank of memory at least as large as the other ranks in the system, or memory board, is designated as the Online Spare rank. If one of the other DIMMs exceeds a threshold rate of correctable memory errors, the affected rank of memory within that DIMM is taken offline and the data is copied to the Online Spare rank. This capability maintains server availability and memory reliability without service intervention or server interruption. The DIMM that exceeded the error threshold can be replaced at the customer's convenience during a scheduled shutdown. Online Spare reduces the chance of an uncorrectable error bringing down

the system; however, it does not fully protect the system against uncorrectable memory errors.

- Online Spare mode is beneficial to businesses with sites that do not have IT staff available to service a failure, do
 not always have replacement memory readily available, or cannot bring down the server until a scheduled shutdown.
 The cost of implementation for Online Spare over Advanced ECC is the hardware cost of the extra DIMMs for the
 spare memory bank.
- The user configures the system for Online Spare mode through the RBSU. Online Spare configuration requirements vary for each server series, but it does not require operating system support or special software beyond the System BIOS. However, if messaging and logging are desired at the console along with messages in HP Systems Insight Manager, an operating system must be used that has system management and agent support for Advanced Memory Protection.

Population order

- The two tables below represent the memory module population order for one processor. The population order for the other processors is identical. SR denotes Single Rank, DR denotes Dual Rank, and QR denotes Quad Rank.
- All memory modules must follow the population order shown in these two tables for all the processors with the following exception:
- QR memory modules must be installed only in memory sockets 2, 5, 8, and 11, while following the population order for those memory sockets.

Processor memory socket	1	2	3	4	5	6
Rank support per memory socket	SR/DR	SR/DR/QR	SR/DR	SR/DR	SR/DR/QR	SR/DR
Population order	A	I	E	C	К	G
Processor memory channel	A	Α	Α	В	В	В

Processor memory socket	7	8	9	10	11	12
Rank support per memory socket	SR/DR	SR/DR/QR	SR/DR	SR/DR	SR/DR/QR	SR/DR
Population order	В	J	F	D	L	Н
Processor memory channel	С	С	С	D	D	D

Population rules

- When installing memory modules, observe the following population rules:
- Use only HP memory modules listed in this document.
- Advanced ECC is not available if x4 and x8 memory modules are mixed in channels (A and B), (C and D), or both, but

standard ECC is still available. Advanced ECC is available if x4 and x8 memory modules are mixed in memory channels (A and C), (B and D), or both.

While adhering to the memory population rules ("Population rules" - see above), performance can be improved by following the

guidelines below:

- Memory modules may be installed one at a time per processor, but installing two at a time per processor provides for additional performance, installing four at a time per processor provides for better performance, and installing equal amounts of memory for all processors provides for best performance.
- Install all memory modules of the same speed on the same processor for best performance.
- Install all memory modules of the same voltage on the same processor for best power.

Advanced Memory Protection (AMP) mode Online Spare Memory has further requirements beyond these listed above. Please refer to the user guide for additional memory configuration requirements

Memory bus speed

Depending on the quantity and native speed of memory modules installed, memory bus speeds can be 1333 MHz, 1066 MHz, 800 MHz, or 667 MHz. Memory bus speeds can be different for each processor.

To determine memory bus speeds, do the following:

Within RBSU, select the Power Management Options menu > Advanced Power Management Options menu > Maximum Memory Bus Frequency menu.

Memory modules per channel	QR	SR or DR	Memory module native speed	Memory bus speed (standard-voltage memory module	Memory bus speed (low-voltage memory module)
1	-	1	SR 1600 MHz ³ DR 1600 MHz ³	1600 MHz	NA
1		1	SR 1333 MHz DR 1333 MHz	1333 MHz ¹	1066 MHz ¹
1	1	-	QR 1066 MHz	1066 MHz ¹	1066 MHz ¹
2	-	2	SR 1333 MHz DR 1333 MHz	1333 MHz ^{1,2}	1066 MHz ^{1,2}
2	1	1	SR 1333 MHz DR 1333 MHz QR 1066 MHz	800 MHz	800 MHz
3	-	3 SR	SR 1333 MHz SR 1600 MHz ³	1066 MHz	1066 MHz
3	-	3 DR	DR 1333 MHz DR 1600 MHz ³	1066 MHz	800 MHz
3	-	3 mixed	SR 1333 MHz DR 1333 MHz SR 1600 MHz ³ DR 1600 MHz ³	1066 MHz	800 MHz
3	1	2	SR 1333 MHz DR 1333 MHz QR 1066 MHz	800 MHz	667 MHz

¹Max. Actual result of lowest DIMM speed

²When 1333MHz selected in BIOS "memory speed with 2DPC" entry

³1600 MHz memory is only supported in conjunction with Opteron 6200 series processors.

Select one of the following menu options:

• Auto (default) - The memory bus speed is set to what is shown in the following table. If the native speed of the installed

memory module is slower than the memory bus speed, the memory bus speed is set to the memory module native speed

 800 MHz-The memory bus speed is set to 800 MHz regardless of the quantity of memory modules installed, unless the

table above reflects a slower memory bus speed.

NOTE: There may be more than one memory bus speed menu option.

NOTE: LVDIMMs support on 2011.08.04 BIOS

Memory Installation Example

These memory installation example shows the memory sockets associated with the first processor only. This can be applied toward the memory sockets associated with the other processor also.

4 RDIMMs per processor

- Standard memory: 4x4GB RDIMMs (16GB per processor)
- Optional memory: Adding 8x8GB RDIMMs to standard memory (80GB per processor)
- Maximum memory: Replacing standard memory with 4x16GB QR RDIMMs and 8x8GB DR RDIMMs (maximum of 128GB per processor)

Processor memory socket	1	2	3	4	5	6
Standard Memory	4GB			4GB		

Optional Memory	4GB	8GB	8GB	4GB	8GB	8GB
Maximum Memory	32GB	32GB	32GB	32GB	32GB	32GB


Processor memory socket	7	8	9	10	11	12
Standard Memory	4GB			4GB		
Optional Memory	4GB	8GB	8GB	4GB	8GB	8GB
Maximum Memory	32GB	32GB	32GB	32GB	32GB	32GB

NOTE: 1.5TB capacity is achieved by loading 1 32GB LRDIMM on every memory channel on all four processors.

The following memory options are available from HP:

The following memory of	phons are available from HF.	
Memory	NOTE: DIMM banks are active only when the corresponding processor socket is populated.	
	Registered DIMMs (RDIMMs)	
	HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9	593907-B21
	Memory Kit	393907-D21
	HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	593911-B21
	HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604500-B21
	HP 4GB (1x4GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit	676331-B21
	HP 8GB (1x8GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit	676333-B21
	HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	593913-B21
	HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604502-B21
	HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit	593915-B21
	HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit	627808-B21
	HP 16GB (1x16GB) Dual Rank x4 PC3-12800R (DDR3-1600) Registered CAS- 11 Memory Kit	684066-B21
	HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit	627810-B21
	Load Reduced DIMMs(LRDIMMs)	
	HP 32GB (1x32GB) Quad Rank x4 PC3L-10600L (DDR3-1333) Load Reduced CAS-9 Low Voltage Memory Kit	647885-B21
	NOTE: Memory must be installed in like-pairs, i.e. two of the same size.	
	Upgrade Options	
	HP DL585 G7 CPU Memory Secondary Upgrade Option NOTE: Adds processor sockets 3 and 4 and associated DIMM slots.	590489-B21
contents		
	d Features Optional Features Service and Support Pre-configured Mo	odels
Smart Buys Config	guration Information - Factory Integrated Models Core Options Additiona	
Memory Storage	Technical Specifications	

Storage

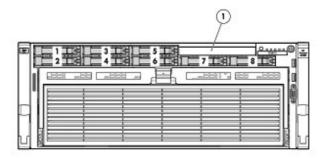

Drive Support

	Quantity Supported	Position Supported	Controller
Removable Media			
Slimline DVD-ROM drive	Up to 1	1	Integrated SATA
HP Slim SATA DVD RW Optical Drive	Up to 1	1	Integrated SATA

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
1.2TB 6G SAS 10K 900GB 6G SAS 10K 600GB 6G SAS 10K 450GB 6G SAS 10K 300GB 6G SAS 10K 300GB 6G SAS 15K 146GB 6G SAS 15K	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller HP Smart Array P212/256 MB Controller HP Smart Array P410/256 MB Controller HP Smart Array P410/512 MB BBWC Controller HP Smart Array P410/Zero Memory Controller HP Smart Array P410/512 MB FBWC Controller HP Smart Array P410/1G FBWC Controller HP Smart Array P411/256 MB Controller HP Smart Array P411/256 MB Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P411/512 MB Flash Backed Write Cache HP Smart Array P411/512 BBWC Controller

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB 6G SAS 7.2K 500GB 6G SAS 7.2K	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller HP Smart Array P212/256 MB Controller HP Smart Array P410/256 MB Controller HP Smart Array P410/512 MB BBWC Controller HP Smart Array P410/Zero Memory Controller HP Smart Array P410/512 MB FBWC Controller HP Smart Array P410/1G FBWC Controller HP Smart Array P411/256 MB Controller HP Smart Array P411/256 MB Controller

SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB 3G SATA 7.2K 500GB 3G SATA 7.2K	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller HP Smart Array P212/256 MB Controller HP Smart Array P410/256 MB Controller HP Smart Array P410/512 MB BBWC Controller HP Smart Array P410/Zero Memory Controller HP Smart Array P410/512 MB FBWC Controller HP Smart Array P410/1G FBWC Controller HP Smart Array P411/256 MB Controller HP Smart Array P411/256 MB Controller HP Smart Array P411/2512 MB BBWC Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P411/512 MB Flash Backed Write Cache HP Smart Array P812/512 BBWC Controller

SATA Hot Plug 2.5" Enterprise Mainstream Solid State Drives

	Quantity Supported	Position Supported	Controller
400GB 3.0G SATA SSD 200GB 3.0G SATA SSD 100GB 3.0G SATA SSD	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller HP Smart Array P212/256 MB Controller HP Smart Array P410/256 MB Controller HP Smart Array P410/512 MB BBWC Controller HP Smart Array P410/Zero Memory Controller HP Smart Array P410/512 MB FBWC Controller HP Smart Array P410/1G FBWC Controller HP Smart Array P411/256 MB Controller HP Smart Array P411/256 MB Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P411/512 MB Flash Backed Write Cache HP Smart Array P812/512 BBWC Controller

6G SAS Hot Plug Enterprise Performance Solid State Drives

	Quantity Supported	Position Supported	Controller
400GB 6G SAS SLC SFF 200GB 6G SAS SLC SFF	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller HP Smart Array P212/256 MB Controller HP Smart Array P410/256 MB Controller HP Smart Array P410/512 MB BBWC Controller HP Smart Array P410/Zero Memory Controller HP Smart Array P410/512 MB FBWC Controller HP Smart Array P410/1G FBWC Controller HP Smart Array P411/256 MB Controller HP Smart Array P411/256 MB Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P411/512 MB Flash Backed Write Cache HP Smart Array P812/512 BBWC Controller

External Storage

	Quantity Supported	Position Supported	Host Controller or Adapter
D2600 Disk Enclosure	Up to 4	External	HP Smart Array P211/256 MB Controller
	Up to 8	External	HP Smart Array P411/256MB BBWC Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P411/1G Flash Backed Write Cache Controller HP Smart Array P812/1G Flash Backed Cache Controller
D2700 Disk Enclosure	Up to 2	External	HP Smart Array P211/256 MB Controller

Up to 4	External	HP Smart Array P411/256 MB Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P411/1G Flash Backed Write Cache Controller HP Smart Array P812/1G Flash Backed Cache Controller

Maximum Stora	e Capacity - (External Enclosures Attached)
Total	200TB
External	192TB (8 D2600 enclosures @ 12 drives per enclosure x 2TB SATA)
Internal	8TB (8 x 1TB SFF SAS/SATA Drives)
Maximum Stora	e Capacity - (External Enclosures Attached)

Maximum Storage Capacity - (External Enclosures Attached)					
.)					

Tape and Disk-Based Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media, including the internal fitting models, see: http://www.hp.com/go/tape. For the complete range of D2D Backup Systems see: http://www.hp.com/go/d2d. For the complete range of \RDX drives and media see: http://www.hp.com/go/rdx. For hardware and software compatibility of HP disk and tape backup products see: http://www.hp.com/storage/SPOCK.

	Position Supported	Controller	Controller Part Number
HP SCSI Tape Drives LTO-1 Ultrium 232 LTO-2 Ultrium 448 LTO-3 Ultrium 920 LTO-3 Ultrium 960 LTO-4 Ultrium 1760 LTO-4 Ultrium 1840 DAT 40 DAT 72 DAT 160 1U Rack-Mount Kit 3U Rack-Mount Kit	External	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter NOTE: Please check the full compatibility information at: http://www.hp.com/storage/SPOCK	412911-B21
HP USB Tape Drives DAT 40 DAT 72 DAT 160 DAT 320 1U USB Rack-Mount Kit	External	USB 2.0 Port	N/A
HP SAS Tape Drives DAT 160 DAT 320 LTO-2 Ultrium 448 LTO-3 Ultrium 920 LTO-4 Ultrium 1760 LTO-4 Ultrium 1840 LTO-5 Ultrium 3000 LTO-5 Ultrium 3280 1U Rack-Mount Kit 3U Rack-Mount Kit	External	HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller NOTE: Please check the full compatibility information at: http://www.hp.com/storage/SPOCK	462828-B21
HP SCSI Tape Autoloaders DAT 72x10 Autoloader 1/8 G2 Autoloader	External	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter NOTE: Please check the full compatibility information at: http://www.hp.com/storage/SPOCK	412911-B21

HP SCSI Tape Libraries, External MSL2024 MSL4048 MSL8096 MSL6000	External	NOTE: Please check the full compatibility information at: http://www.hp.com/storage/SPOCK	
HP SAS Tape Autoloaders and Libraries 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096	External	HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller NOTE: Please check the full compatibility information at: http://www.hp.com/storage/SPOCK	462828-B21
HP Fibre Channel Tape Libraries MSL2024 MSL4048 MSL8096 MSL6000	External	Please consult the EBS connectivity matrix at: http://www.hp.com/go/ebs for connectivity information and the supported Fibre Channel HBAs shown in this QuickSpecs.	N/A
HP USB RDX Removable Disk Backup System RDX160 RDX320 RDX500 RDX750 RDX1TB	External	USB 2.0 Port	N/A
HP D2D Backup Systems, iSCSI D2D2503i D2D4004i	External	Embedded Network Controller. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.	N/A
HP D2D Backup Systems, Fibre Channel D2D4000fc	External	Direct server attach is not supported, requires connection via SAN fabric. See: http://www.hp.com/storage/SPOCK	N/A
<u>contents</u>			
Overview Standard F		ptional Features Service and Support Pre-configured Mo tion - Factory Integrated Models Core Options Additiona	
	Technical Sp		options

Technical Specifications

System Unit	Dimensions (H x W x I (with bezel)	Dimensions (H x W x D) 6.94" x 19.0" x 27.55" (17.6cm x 48.3cm x 70.0cm) (with bezel)		
	Weight (approximate)	Maximum (all hard drives, power supplies, DIMMs and processors installed)	100.0 lb (45.4 kg)	
		Minimum (one hard drive, two power supplies, four DIMMs and two processors installed)	66.0 lb (30.0 kg)	
	Input Requirements	Rated Line Voltage	100 - 127 VAC,	

(per power supply) Rated Input Current 12 A (at 100 VAC), 8 A (at 200 VAC) Rated Input Prequency 50 to 60 Hz Rated Input Power 1161 W (at 100 VAC), 1598 W (at 240 VAC) BTU Rating Maximum 3960 BTU/hr (at 200 VAC) Power Specifications NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at ut: www.pb.com/go/prolent-energy-efficient or www.pb.com/go/prolent-energy-efficient or wow-energy of the soft of 95*F) at sealewel with antituted energy efficient or 3050 m (10.000 ft	(por power supply)		200 - 240 VAC	
Rated Input Frequency Rated Input Power 50 to 60 H2 BTU Rating Maximum 3960 BTU/Fr (at 100 VAC), 1598 W (at 240 VAC) Power Specifications NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at ut: www.hp.com/go/Inplant-energy-ficient or www.hp.com/go/Inplant-energy-ficient or unon-condensing ID W (low line), 1300 W (high line) System Iniet Temperature Operating Operating IO to 50° C (50° to 55°F) at sea level with an attituted derating of low fow anumber of potions installed. Non-operating Operating 30° to 60°C (22° to 140°F). Maximum rate of change is 20°C/fr (30°F/h). Non-operating (62.4°F) maximum wet bub temperature, non-condensing. Altitude Operating 3050 m (10.00 th). This value may be lininte	(per power suppry)	Rated Input Current	12 A (at 100 VAC),	
BTU Rating Maximum 3960 BTU/hr (at 100 VAC), 5430 BTU/hr (at 200 VAC) Power Specifications NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at ut: www.hp.com/go/pollant-energy-efficient or www.hp.com/go/pollant-energy-efficient/f		Rated Input Frequency		
5450 BTU/hr (at 200 VAC) Power Specifications NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at ut: www.hp.com/go/ppoweradvisor • Click on the system of interest. Example: DL585 G7 • Follow the instructions of the next screens Power Supply Output (per power supply) Rated Steady-State 910 W (low line), 1300 W (high line) System Inlet Temperature Power Good W (low line), 1300 W (high line) 10° to 3° C (50° to 95° F) at sea level with an altitude derating of 1.0° C per every 305 m (1.8° F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10° Chr (18° F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan tault or above 30° C (66° F). Relative Humidity (non-condensing) Operating 30° to 60° C (-22° to 140° F). Maximum rate of change is 20° Chr (36° F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan tault or above 30° C (66° F). Altitude Operating 5 to 95% relative humidity (Rh), 38.7° C (101.7° F) maximum wet bub temperature, non-condensing. Non-operating S05 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Altitude Operating 9144 m (30,000 ft). This value may be limited by the type and n		Rated Input Power		
Advisor which is available online located at uri: www.hp.com/go/ppolant-energy-efficient or www.hp.com/go/hppoweradvisor Click on the system of interest. Example: DL585 G7 Follow the instructions of the next screens Power Supply Output (per power supply) Rated Steady-State Power 910 W (low line), 1300 W (high line) System Inlet Temperature Operating 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 th) above sea level to a maximum of 3050 m (10.000 th), no direct sustained sunlight. Maximum rate of change is to 1°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (8°F). Non-operating -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (18°F/hr). Relative Humidity (non-condensing) Operating 100 s0% relative humidity (Rh), 28°C (82 + °F) maximum wet bulb temperature, non-condensing. Altitude Operating 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable attitude change rate is 457 m/min (1500 ft/min). Acoustic Noise Listed are the declared A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 17779 (ECMA 74) and declared in accordance with ISO 29296 (ECMA 109). Idle	BTU Rating	Maximum		
Follow the instructions of the next screens Power Supply Output (per power supply) Rated Steady-State Power Maximum Peak Power Maximum Peak Power 910 W (low line), 1300 W (high line) 10 to 30° C (50 r to 40° F) 10 to 400° Parting 10 to 400° relative humidity (Rh), 28° C (86 ° F). Non-operating 10 to 90° relative humidity (Rh), 28° C (101.7 °F) maximum wet bulb temperature, non-condensing. Non-operating 10 to 90° relative humidity (Rh), 28° C (101.7 °F) maximum wet bulb temperature, non-condensing. Non-operating 10 to 90° relative humidity (Rh), 38.7° C (101.7 °F) maximum wet bulb temperature, non-condensing. Non-operating 10 to 90° relative humidity (Rh), 38.7° C (101.7 °F) maximum wet bulb temperature, non-condensing. Non-operating Usde are the declared A -Weighted sound pressur	Power Specifications	Advisor which is availabl www.hp.com/go/proliant-	system power ratings use the HP Power e online located at url: energy-efficient or	
(per power supply) Power 1300 W (high line) Maximum Peak Power 910 W (low line), 1300 W (high line) System Inlet Operating 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per very 1000 ft), hood irect sustained sunlight. Maximum rate of change is 10°C/tr (18°F/hr). The upper limit may be limited by the type and number of options installed. System Inlet Non-operating -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/tr (36°F/hr). Relative Humidity Operating 10 to 90% relative humidity (Rh), 28°C (86°F). (non-condensing) Operating 10 to 90% relative humidity (Rh), 28°C (101.7°F) maximum wet bulb temperature, non-condensing. Altitude Operating 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Autitude Operating 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Acoustic Noise Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LPAM) when the product is operating in a 23° C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 7779 (ECMA 74) and d				
System Inlet Temperature Operating 10° to 35° C (50° to 95° F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft), no direct sustained soulight. Maximum rate of change is 10° C/hr (18° F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30° C (86° F). Relative Humidity (non-condensing) Operating -30° to 60° C (-22° to 140° F). Maximum rate of change is 20° C/hr (36° F/hr). Non-operating -30° to 60° C (-22° to 140° F). Maximum rate of change is 20° C/hr (36° F/hr). Non-operating -30° to 60° C (-22° to 140° F). Maximum rate of change is 20° C/hr (36° F/hr). Non-operating 5 to 95% relative humidity (Rh), 28° C (82.4° F) maximum wet bulb temperature, non-condensing. Non-operating 5 to 95% relative humidity (Rh), 38.7° C (101.7° F) maximum wet bulb temperature, non-condensing. Altitude Operating 30050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 t/min). Acoustic Noise Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 9779 (ECMA 74) and declared in acco		•	. ,	
Temperature an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F). Non-operating -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr). Relative Humidity (non-condensing) Operating 10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing. Non-operating 5 to 55% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing. Altitude Operating 5 to 55% relative humidity (Rh), 38.7°C (10.000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Acoustic Noise Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound power levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 9779 (ECMA 74) and declared		Maximum Peak Power		
Relative Humidity (non-condensing) Operating 10 to 90% relative humidity (Rh), 28 °C (82.4 °F) maximum wet bulb temperature, non-condensing. Non-operating 5 to 95% relative humidity (Rh), 38.7 °C (101.7 °F) maximum wet bulb temperature, non-condensing. Altitude Operating 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Acoustic Noise Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23 °C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). Idle L WAd 6.8 B (with PCI-E) L pAm A dBA Operating L WAd 6.8 B (with PCI-E) L pAm A dBA Classification (EMC) FCC Rating Class A Normative Standards CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254;	-	Operating	an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C	
(non-condensing) (82.4 °F) maximum wet bulb temperature, non-condensing. Non-operating 5 to 95% relative humidity (Rh), 38.7 °C (101.7 °F) maximum wet bulb temperature, non-condensing. Altitude Operating 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Acoustic Noise Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23 °C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). Idle L WAd 6.8 B (with PCI-E) L pAm NA dBA Operating L WAd 6.8 B (with PCI-E) L pAm NA dBA Operating L WAd 6.8 B (with PCI-E) L pAm NA dBA Operating Class A Classification (EMC) Normative Standards CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254;		Non-operating		
Altitude Operating 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Acoustic Noise Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). Idle L WAd 6.8 B (with PCI-E) L pAm NA dBA Operating L WAd 6.8 B (with PCI-E) L pAm NA dBA Operating Class A Classification (EMC) FCC Rating Class A Normative Standards CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254;	-	Operating	(82.4°F) maximum wet bulb temperature,	
Acoustic NoiseListed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). Idle L WAd Derating L WAd FC Rating Classification (EMC)Mad Ba FCC Rating Normative Standards CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254;		Non-operating	(101.7°F) maximum wet bulb temperature,	
Acoustic NoiseListed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23 °C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). Idle L WAd6.8 B (with PCI-E) L pAmVertice L PAMEmissions Classification (EMC)FCC Rating Normative StandardsClass A CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254;	Altitude	Operating	limited by the type and number of options installed. Maximum allowable altitude change	
declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). Idle L WAd6.8 B (with PCI-E) L pAmIdleL WAd6.8 B (with PCI-E) L pAmMA dBAOperating L WAd6.8 B (with PCI-E) L pAmIdleDerating L WAdGass AFCC Rating (EMC)Class AFCC Rating (EMC)Class A		Non-operating	altitude change rate is 457 m/min (1500	
L WAd 6.8 B (with PCI-E) L pAm NA dBA Operating 6.8 B (with PCI-E) L WAd 6.8 B (with PCI-E) L WAd 6.8 B (with PCI-E) L pAm NA dBA Emissions FCC Rating Class A Classification (EMC) FCC Rating Class A	Acoustic Noise	declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).		
L pAm NA dBA Operating 6.8 B (with PCI-E) L pAm NA dBA Description Class B (with PCI-E) L pAm NA dBA Emissions FCC Rating Class A Classification (EMC) Normative Standards CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254;			6.8 B (with PCI-E)	
Operating 6.8 B (with PCI-E) L WAd 6.8 B (with PCI-E) L pAm NA dBA Emissions FCC Rating Class A Classification Normative Standards CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254;			, ,	
L WAd6.8 B (with PCI-E)L pAmNA dBAEmissionsFCC RatingClassificationFCC RatingNormative StandardsCISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254;		•		
EmissionsFCC RatingClass AClassificationNormative StandardsCISPR 22; EN55022; EN55024; FCC CFR(EMC)47, Pt 15; ICES-003; CNS13438; GB9254;			6.8 B (with PCI-E)	
Classification (EMC)Normative StandardsCISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254;		L pAm	NA dBA	
(EMC)		FCC Rating	Class A	
		Normative Standards	47, Pt 15; ICES-003; CNS13438; GB9254;	

60950-1; IEC 60950-1

		60950-1; IEC 60950-1	
		NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.	
Integrated Lights-Out 3	Architecture	PCI Express based health and remote management ASIC	
(iLO 3) integrated on	Processor	PCI Express RISC processor core running at 250MHz	
system board	Upgradeability	Option firmware upgradeable via Flash ROM.	
	Interfaces	One Ethernet Sideband connection (10/100/1000 Mb/s)	
		One Ethernet network connection (10/100Mb/s)	
	Memory	128-MB RAM with ECC	
	Operating System	Microsoft Windows 2008 R2	
	Support	Microsoft Windows 2008 (32 bit and 64 bit)	
		Microsoft Windows Server 2008 Standard Edition (32bit and 64bit)	
		Microsoft Windows Server 2008 Enterprise Edition (32bit and 64bit)	
		Microsoft Windows Server 2003 and Windows Server 2003 R2, and Windows Server 2003 for Extended Systems Standard Edition,	
		Enterprise Edition	
		Red Hat Enterprise Linux 5 (32 bit and 64 bit)	
		SUSE Linux Enterprise Server 11 (32bit and 64bit)	
		SUSE Linux Enterprise Server 10 (32bit and 64bit)	
		VMware ESX 4.0	
		VMware ESX 3.5.0	
	Client System Support	Microsoft Windows 7	
		Microsoft Windows XP Professional Edition	
		Microsoft Windows Vista Business and Ultimate Editions	
		Red Hat Enterprise Desktop 5.00	
		SUSE Linux Enterprise Desktop 11	
		SUSE Linux Enterprise Desktop 10	
	Client Browser Support	t Microsoft Internet Explorer 8	
		Microsoft Internet Explorer 7	
		Microsoft Internet Explorer 6	
		Firefox 3.5 (on supported Windows and Linux systems)	
		Firefox 3.0 (on supported Windows and Linux systems)	
	Command Line	Secure Shell and serial port access	
	Support	Secure Socket Layer	
		Secure Shell version 2	
	Security	Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser, CLP and XML scripting interface	
		AES encryption of video	
		RC4 encryption of video	
	Directory Support Services	Active Directory v1.0 (Windows 2003)	
	Driver Support	HP ProLiant iLO3 Management Controller Driver Package	
	Management protocols supported		
Smart Array P410i	Dimensions	Embedded	
Controller	Disk Drive and Enclosure Interface - Transfer rate	6Gb/s SAS (Serial Attached SCSI) 3Gb/s SATA (Serial ATA)	
	SAS Connectors	2 internal 4X connectors	

Cache Memory Speed DDR2-800MHz with 40 or 72-bit wide bus

	Server Interface	x4 PCIe 2.0 provides 20	GB/s maximum bandwidth	
	SAS Speed	8 6Gb/s SAS links provide 4.8GB/s maximum bandwidth		
	Cache Memory	Zero Memory RAID has no cache memory 40-bit 256MB ECC protected cache (battery upgrade available) 72-bit 512MB BBWC or 72-bit 512MB and 1G FBWC		
	Logical Drives Supported	Zero Memory, Up to 2 logical volumes (8 physical drives) Up to 64 logical drives with cache		
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space		
	RAID Support	RAID 6, 6+0 (Advanced Data Guarding) NOTE: RAID 6, 6+0 can be enabled with one of the following combinations:		
		 256 MB cache, Battery kit and Smart Array Advanced Pack License key option upgrades 512 MB BBWC/FBWC and Smart Array Advanced Pack License key option upgrades 1G FBWC and Smart Array Advanced Pack License key option upgrades RAID 5, 5+0 (Distributed Data Guarding) NOTE: A minimum or 256 MB cache is required to enable RAID 5, 5+0 support 		
		RAID 1+0 (Striping & Mirroring) RAID 0 (Striping), RAID 1 (Mirroring)		
HP NC375i Integrated Network Interface		10/100/1000-T		
Quad Port Gigabit	Compatibility	IEEE 802.3 10Base-T		
Server Adapter		IEEE 802.3ab 1000Base-T		
		IEEE 802.3u 100Base-TX IEEE 802.3ad 1000Base-TX IEEE 802.1p 100Base-TX IEEE 802.1q 100Base-TX		
	Data Transfer Method	PCI Express 2.0 x8		
	Controller	Qlogic/NetXen NX3031		
	Network Transfer Rate	10Base-T (Full-Duplex)	20 Mb/s	
		100Base-TX (Full- Duplex)	200 Mb/s	
		1000Base-TX (Full- Duplex)	2000 Mb/s	
	Connector	RJ-45		
	Cable Support	10Base-T	Categories 3, 4, or 5 UTP; up to 328 ft (100 m)	
		10/100/1000 Base-TX	Category 5 UTP up to 328 ft (100 m)	
HP 331i Integrated Qua	d Network Processor	Broadcom BCM5719 cl	hipset	
Port Gigabit Server Adapter	Data rate	Four ports, each at 2 Gbps full duplex; 8 Gbps aggregate full duplex theoretical bandwidth.		
	Bus type	PCIe 2.0		
	Bus speed	Gen 2 x4		
	Connector	RJ-45 (Four)		
	Cable distance	Up to 328 ft (100 m)		
	Wiring	Category 5/ (CAT-5) or better twisted-pair cabling		
			, 802.3x, Dynamic 802.3ad, 802.1Q, 802.3az,	

Environment-friendly End-of-life Management Hewlett-Packard offers end-of-life HP product return, trade-in, and

recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2013 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. AMD, the AMD Arrow logo, AMD Opteron[™], and combinations thereof, are trademarks of Advanced Micro Devices, Inc.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

DA-13642 47 - Version 47 - May 13, 2013