


Overview


HP ProLiant DL580 Generation 7 (G7)

Traditionally, mission-critical RAS (Reliability, Availability and Serviceability) features have been associated with RISC (Reduced Instruction Set Computing) systems. HP has designed an eco-system of RAS functionalities that has raised the bar for the HP ProLiant DL580 G7. The HP ProLiant DL580 G7 continues to deliver best-in-class HP performance, manageability, and reliability features with the latest Intel processor technology and it is the ideal choice for customers that are ready to deploy Large Databases that require scale-up compute processing, large memory and I/O intensive applications.

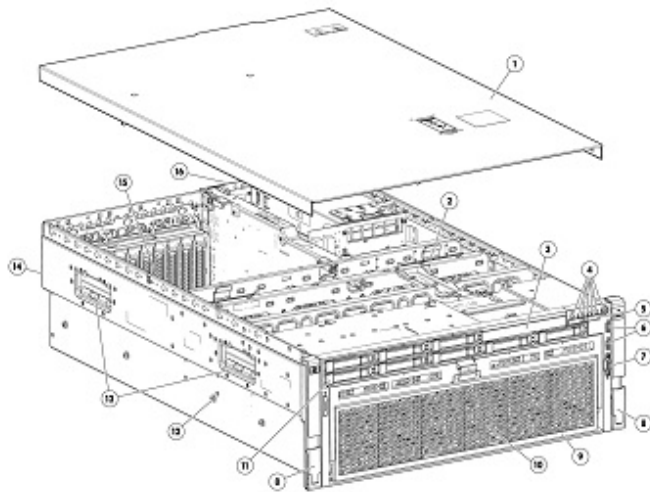

Front View:

1. Quick Removal Access Panel
2. 4 Hot Plug Redundant Fans Standard on all models
3. HP Slim SATA DVD ROM Optical Drive
4. Front Panel LED Display and Power Button
5. Slide-out Systems Insight Display
6. Two front accessible USB 2.0 ports
7. One front video port
8. Quick release levers for fast server access
9. Front accessible Processor and memory drawer
10. Support for up to four Intel® Xeon® Processors
11. Support for up to 8 Small Form-Factor (SFF) SAS, Serial ATA (SATA) or SSD drives
12. Universal Tool-less "Snap In" Sliding Rail Solution
13. Server Lifting Handles
14. 4U (7" Height) Rack Form Factor
15. Up to 11 slots supported; all full-length/full-height

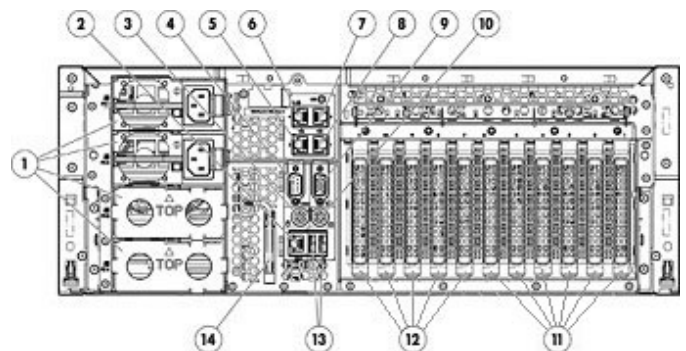

Rear View:

1. Hot Plug Redundant Power Supplies (2 or 4 depending on the model)
2. Integrated Lights-Out 3 port
3. Mouse port
4. Serial Port
5. Gigabit NIC Ports
6. Gigabit NIC Ports
7. Gigabit NIC Ports
8. Gigabit NIC Ports
9. Video Port
10. Keyboard port
11. PCI-Express or PCI-X option (slots 1-6)
12. PCI-Express slots (slots 7-11)
13. Two USB ports
14. Service tool

What's New

- Flexible technologies provide customer choice in networking with either a Broadcom or Qlogic solution.

Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor One or more of the following depending on model	Ten-Core Processors Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) Processor Intel® Xeon® E7-4860 (2.26GHz/10-core/24MB/130W) Processor Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) Processor Intel® Xeon® E7-8867L (2.13GHz/10-core/30MB/105W) Processor Eight-Core Processors Intel® Xeon® E7-8837 (2.67GHz/8-core/24MB/130W) Processor Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) Processor Intel® Xeon® E7-4820 (2.0GHz/8-core/18MB/105W) Processor Intel® Xeon® X7560 (2.26GHz/8-core/24MB/130W) Processor Intel® Xeon® X7550 (2.0GHz/8-core/18MB/130W) Processor Intel® Xeon® L7555 (1.86GHz/8-core/24MB/95W) Processor Six-Core Processors Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) Processor Intel® Xeon® E7540 (2.0GHz/6-core/18MB/105W) Processor Intel® Xeon® E7530 (1.86GHz/6-core/12MB/105W) Processor Intel® Xeon® X7542 (2.66GHz/6-core/18MB/130W) Processor Quad-Core Processors Intel® Xeon® E7520 (1.86GHz/4-core/18MB/95W) Processor NOTE: New Intel Microarchitecture with Intel Virtualization Technology FlexMigration. Industry Standard Intel® 7500 Chipset with four high-speed interconnects up to 6.4GT/s.
---	---

Cache Memory One of the following depending on model	30MB (1 x 30MB) Level 3 cache NOTE: For E7-8867L and E7-4870 Processors 24MB (1 x 24MB) Level 3 cache NOTE: For E7-8837, E7-4860, E7-4850, E7-4830, X7560, and L7555 Processors. 18MB (1 x 18MB) Level 3 cache NOTE: For E7-4820, E7-4807, X7550, E7540, X7542, and E7520 Processors. 12MB (1 x 12MB) Level 3 cache NOTE: For E7530 Processor.
--	---

Chipset	Industry Standard Intel® 7500 Chipset NOTE: For more information regarding Intel chipsets, please see the following URL: http://www.intel.com/products/server/chipsets/
----------------	---

Upgradeability	Upgradeable to quad (4) processors
-----------------------	------------------------------------

Memory Protection	Advanced ECC Double Data Device Correction - DDDC NOTE: Intel® Xeon® Processor E7 series powered only. Mirrored Memory Online Spare Memory
--------------------------	---

Memory One of the following depending on Model	Type	PC3-10600R DIMMs (DDR3)
	Standard (2P Models)	16GB (4 x 4GB)
	Standard (4P Model - E7540)	32GB (8 x 4GB)
	Standard	64GB (16 x 4GB)

(4P Models - X7560, X7550)	
Standard	64 (8 x 8GB)
(2P Models - E7-4830, E7-4807)	
Standard	128GB (16 x 8GB)
(4P Models - E7-4870, E7-4850)	
Maximum	2TB (64 x 32GB)*
	* Intel® Xeon® Processor E7 series powered only, 1TB max on 7500 series

Network Controller HP NC375i Integrated Quad Port Gigabit Server Adapter
NOTE: Optional Dual Port 10GbE upgrade (replaces two 1G ports)

Expansion Slots

NOTE: Up to 11 slots supported; all full-length/full-height. Standard: 2 PCI-E 2.0 x8, 3 PCI-E 2.0 x4.

NOTE: The primary video controller needs to be located in the Main I/O board slots 7-11 providing video during boot. A video controller installed in an I/O expansion slot 1-6 cannot be the primary controller. It will not have video during boot but will provide video once OS and drives load.

Expansion Slots (Main IO Board standard)	Expansion Slot #	Technology	Width	Connector Width*	Bus / Dev Number**	Form Factor	Notes
	1	N/A	N/A	N/A	N/A	N/A	N/A
	2	N/A	N/A	N/A	N/A	N/A	N/A
	3	N/A	N/A	N/A	N/A	N/A	N/A
	4	N/A	N/A	N/A	N/A	N/A	
	5	N/A	N/A	N/A	N/A	N/A	
	6	N/A	N/A	N/A	N/A	N/A	
	7	PCI Express Gen2	x4	x8	0/0A	FH/FL	
	8	PCI Express Gen2	x4	x8	0/09	FH/FL	
	9	PCI Express Gen2	x8	x16	0/07	FH/FL	
	10	PCI Express Gen2	x4	x8	0/01	FH/FL	
	11	PCI Express Gen2	x8	x16	0/05	FH/FL	

* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

** Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

FL= Full length; FH = Full height; LP = low-profile.

Expansion Slots

Expansion Slots with IO Expander (combination PCI-X, PCI-e and 300W GPU)	Expansion Slot #	Technology	Width	Connector Width*	Bus / Dev Number**	Form Factor	Notes
	1	PCI-X	64-bit	N/A	82/01	FH/FL	100MHz
	2	PCI-X	64-bit	N/A	82/02	FH/FL	100MHz
	3	PCI Express Gen2	x16	x16	80/07	FH/FL	
		PCI Express					

4	PCI Express Gen2	x4	x8	80/01	FH/FL	N/A
5	N/A	N/A	N/A	N/A	N/A	
6	PCI Express Gen2	x16	x16	80/03	FH/FL	
7	PCI Express Gen2	x4	x8	0/0A	FH/FL	
8	PCI Express Gen2	x4	x8	0/09	FH/FL	
9	PCI Express Gen2	x8	x16	0/07	FH/FL	
10	PCI Express Gen2	x4	x8	0/01	FH/FL	
11	PCI Express Gen2	x8	x16	0/05	FH/FL	

* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

** Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

FL= Full length; FH = Full height; LP = low-profile.

Expansion Slots

Expansion Slots with I/O Expander (standard PCI-e option)	Expansion Slot #	Technology	Width	Connector Width*	Bus / Dev Number**	Form Factor	Notes
	1	PCI Express Gen1	x4	x8	80/00	FH/FL	
	2	PCI Express Gen2	x8	x16	80/09	FH/FL	
	3	PCI Express Gen2	x8	x16	80/07	FH/FL	
	4	PCI Express Gen2	x4	x8	80/01	FH/FL	
	5	PCI Express Gen2	x8	x16	80/05	FH/FL	
	6	PCI Express Gen2	x8	x16	80/03	FH/FL	
	7	PCI Express Gen2	x4	x8	0/0A	FH/FL	
	8	PCI Express Gen2	x4	x8	0/09	FH/FL	
	9	PCI Express Gen2	x8	x16	0/07	FH/FL	
	10	PCI Express Gen2	x4	x8	0/01	FH/FL	
	11	PCI Express Gen2	x8	x16	0/05	FH/FL	

* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

** Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

FL= Full length; FH = Full height; LP = low-profile.

Storage Controller One of the following depending on Model

Base Models	HP Smart Array P410i/512 MB FBWC Controller
High Performance Models	HP Smart Array P410i/1G FBWC Controller

The Flash Backed Write Cache (FBWC) increases cache data retention capabilities from two days of existing battery backed write cache (BBWC) to infinite data retention.

- Standard on all Models

- Transportable data protection
- Increases overall controller performance

Internal Storage Devices	Diskette Drive	None
	Optional Optical Drive	HP Slim SATA DVD ROM Optical Drive NOTE: Standard on Xeon Processor 7500 series models
	Hard Drives	None ship standard
	Hard Disk Drive Backplane	Internal SAS backplane supports up to eight SFF hard disk drives

Maximum Internal Storage	Hot Plug SFF SAS	9.6TB	8 x 1.2TB
	Hot Plug SFF SATA	8.0TB	8 x 1TB
	Hot Plug SFF SSD	960GB	8 x 120GB
	Hot Plug SFF SAS SSD	6.4TB	8 x 800GB
	Hot Plug SFF SATA SSD	3.2TB	8 x 400GB
NOTE: There is an extra internal SSD slot available as well.			

Interfaces	Serial	1
	Video	1 front; 1 rear
	Network RJ-45	4
	iLO 3 Remote Management	1
	Keyboard	1
	Pointing Device (Mouse)	1
	SD Slot	1
	USB 2.0 Ports	6 total: 2 front; 2 rear; 2 internal

Industry Standard Compliance	ACPI 2.0. Compliant
	PCIE 2.0 Compliant
	PXE Support
	WOL Support
	Physical Address Extension (PAE) Support
	Microsoft® Logo certifications
	USB 2.0 Support

Server Power Cords	NOTE: If customers require a local power cord, they can check the power cord matrix for the appropriate sku. Please see the following power cord matrix for details: http://www.hp.com/go/powercordmatrix
---------------------------	--

Power Supply One of the following depending on Model	HP 1200W Common Slot Platinum Hot Plug Power Supply Kit NOTE: Supported on the E7-4870, E7-4850, E7-4830 and E7-4807 Models
	HP 1200W Common Slot Silver Hot Plug Power Supply Kit NOTE: Supported on the X7560, X7550, E7540, E7530, E7520 Models NOTE: Two Hot Plug Power Supplies ship standard with 2P Models. Four Hot Plug Power Supplies ship standard with 4P Models.
	Power Supply Requirement Override NOTE: The HP ProLiant DL580 G7 does an inventory of the system configuration to determine what level of redundancy the power supply configuration supports based on some configuration assumptions. The level of redundancy will be reported during the system power on. For planning purposes you can use the Power Advisor (www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor) which is more accurate to determine the power requirements. Also, there is an RBSU override switch capability that allows the user to override the base setting if the Power Advisor indicates redundancy with their configuration.

System Fans	Four Hot Plug redundant fans standard (3+1)	
Operating Systems and Virtualization Software Support for ProLiant Servers	Microsoft Windows Server Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) Oracle Solaris VMware Citrix XenServer NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: http://www.hp.com/go/ossupport and our driver download page http://www.hp.com/support/DL580G7	
Graphics	Integrated ATI ES1000 with 64MB embedded video SDRAM Max Resolution 1280 x 1024 x 16M color	
Form Factor	Rack (4U = 7 inches), ships with Quick Deploy Sliding Rail System, an ambidextrous cable management arm and quick release levers for fast and easy serviceability and in-rack tool-less access to major components. Space saving form factor (4U) provides space efficiencies while providing maximum deployment flexibility.	
HP Insight Management	HP Service Pack for ProLiant	<p>HP Service Pack for ProLiant (SPP) and HP Smart Update Manager (HP SUM) version 5 provide a new, comprehensive approach to firmware and system software maintenance. Together they provide better operating stability and ensure maximum uptime. The SPP will be updated at a predictable cadence, typically coinciding with new HP server hardware launches. By enabling firmware to be updated online and integrating firmware and system software updates in one operation HP SUM and the SPP offer faster updates of individual servers and dramatically faster updates of entire BladeSystem enclosures. Further improving system uptime and stability is the fact that HP provides 12 months of support on each Service Pack for ProLiant.</p> <p>The user experience around HP SUM and the SPP has been improved in several ways, starting with the web download. A single web page provides access to a single download containing both the latest version of HP SUM version 5 and the latest SPP. Optional smaller subsets with only specific types of servers or specific operating systems are offered to save on download time. The HP SUM application has been re-written to provide a more straightforward, intuitive user interface that guides the user through the steps of discovery, analyses and update, providing comprehensive information on available updates, criticality and interdependencies. This information is also available in reports. By providing the option of multiple local or shared repositories which can be easily updated from hp.com, HP SUM provides the tools to optimize stability and consistency throughout the company. While HP SUM and the SPP will recommend the combinations of firmware and system software that HP has found to be the best practice, the application gives customers the flexibility to set their own specific baseline.</p> <p>The Service Pack for ProLiant has been rigorously tested with specific attention for interaction between firmware, drivers and agents both within the server as well as in interaction with the BladeSystem enclosure components (Onboard Administrator and Virtual Connect). This testing ensures the highest quality as well as providing the input for HP SUM to deploy updates taking into account all interdependencies, when determining the correct updates and order of update deployment.</p> <p>The Service Pack for ProLiant (which includes HP SUM 5) can be downloaded from: www.hp.com/go/spp/download. More information can be found: http://www.hp.com/go/spp and http://www.hp.com/go/hpsum</p>
	HP Insight Foundation	Insight Foundation is being baselined at version v8.70 which means

the following:

- Its Media Kit (contains 2 SmartStart CDs, the Firmware DVD, and the Management DVD) will continue to ship with all supported ProLiant G7 or earlier BTO servers until the last supported server is no longer shipping.
- The Media Kit will not be updated past version 8.70.
- ProLiant G7 or earlier CTO servers are able to order the Media Kit with the understanding that the media is not updated. Please check specific server QuickSpecs for availability of CTO Kit.
- PSP and Firmware DVD downloads will be updated through 2Q 2012 at the HP Insight Foundation Suite for ProLiant downloads tab: <http://www.hp.com/go/foundation>

Customers are urged to use the replacement product, HP Service Pack for ProLiant, instead of Insight Foundation Suite which is found at these location:

www.hp.com/go/spp

www.hp.com/go/spp/download

HP Integrated Lights-Out (iLO) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP iLO functions without additional software and can be accessed from any location via a web browser. HP iLO works hand-in-hand with HP Systems Insight Manager, Insight Control and Insight Dynamics for ProLiant, helping customers unleash the value of the ProLiant platform and deliver the highest possible quality of IT service. For more information, visit: www.hp.com/go/iLO

Intelligent Manageability

HP Systems Insight Manager
SmartStart
Redundant ROM
Remote Flash ROM
Management Agents
Integrated Management Log (IML)
Automatic Server Recovery-2 (ASR-2)
ROM-Based Setup Utility (RBSU)
Dynamic Sector Repairing (with Smart Array Controllers)
Drive Parameter Tracking (with Smart Array Controllers)
Pre-Failure Warranty (covers processors, SAS hard drives and memory)
Redundant/adaptive load balancing NIC Support
Hot Spare Boot

NOTE: Upon the event of a failed processor in a multi-processing environment, the system will automatically reboot and use the remaining good processor(s).

HP Insight Online

HP Insight Online is a new capability available through the HP Support Center portal for one stop, secure access to product and HP support information specific to your IT environment. Insight Online can automatically display devices remotely monitored by HP Insight Remote Support. With Insight Online's easy navigation you can efficiently track your IT support contracts and device status from anywhere and at anytime. www.hp.com/go/insightonline

HP Proactive Insight experience

Prevent problems with innovative, automated monitoring tools and proactive services. The HP Proactive Insight experience consist of using Insight Online, Insight Remote Support, and Proactive Care Support Service as one integrated solution. The Proactive Insight experience provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit: www.hp.com/go/proactiveinsightexperience

Security

Power-on password
Keyboard password
External USB port enable/disable
Network Server Mode
Serial interface control

Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

contents

Overview Standard Features Optional Features Service and Support Pre-configured Models
Configuration Information - Factory Integrated Models Core Options Additional Options Memory
Storage Power Specifications Technical Specifications

Optional Features

HP Insight management

HP Insight Control

HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see <http://www.hp.com/go/insightcontrol>.

HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, see: <http://www.hp.com/services/insight>.

HP iLO Advanced

HP Integrated Lights-Out Advanced License a product option, providing smart remote server management without compromise. iLO Advanced unlocks the full set of remote administration functionality for all HP ProLiant servers by activating the full Virtual Keyboard Video and Mouse remote console, multi-user collaboration, console record and replay, GUI-based and scripted virtual media and virtual folders, and enhanced security and power management functionality. For more information, see: <http://www.hp.com/go/iloadvance>

HP Insight Dynamics for ProLiant

HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. As a powerfully integrated by design toolkit to accelerate complex technology projects and simplify daily operations that ultimately enable IT Staff personnel to dynamically keep pace with the organizations changing business requirements. It enables them to plan capacity and power continuously, balance across physical and virtual resources, and ensure cost-effective high availability. It also enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a self-service portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements. In addition to the previous functional benefits, it also provides a cost-effective disaster recovery for physical and virtual environments that works with HP Continuous Access software for both the Enterprise Virtual Array and the XP storage array allowing application environments to be reactivated in minutes with the touch of a button to a remote location.

NOTE: For more information, visit:
<http://www.hp.com/go/insightdynamics>

Solutions

The ProLiant DL580 G7 server is an enterprise class, 4 socket server designed for maximum scalability and high availability. Its innovative chassis offers unsurpassed flexibility and serviceability in a versatile form factor. Based upon the latest industry standard processing, memory, I/O and networking technologies, the ProLiant DL580 G7 provides the highest levels of performance demanded by today's compute intensive applications. Unparalleled high availability features, including hot-plug and redundant components, guarantee maximum uptime. HP Integrated Lights-Out 3 (iLO3) technology allows remote administration from a standard web browser without ever having to visit the server. Within the 4U dense form factor, it's highly expandable architecture provides maximum application deployment flexibility with the ability to add PCI-Express, PCI-X, 2 - 10GB NICs and battery-backed write cache options. Innovative features, such as the ability to access processors, memory, hard drives, and power supplies while the unit remains secured in the rack, enable rapid response to service events, radically decreasing overall IT costs and server downtime.

Typical Usage:

Space-constrained corporate data centers and service providers
Network and I/O expandability, inbuilt availability and reliability features, advanced power management capabilities and large internal storage make DL580 G7 ideal for corporate datacenters.

Database, Messaging and Business Applications

Large internal storage, refined I/O slots options, high network bandwidth, new DDR3 expandable memory combined with latest Intel 8-core expandable processors in DL580 G7 provide everything necessary for today's database, messaging and business applications.

Virtualization and Consolidation

HP's 4S architecture, inbuilt advanced reliability and scalability features make DL580 G7 a perfect platform for virtualization and consolidation solutions. HP's Insight control offerings make it easy to manage, deploy and migrate virtualized servers with VMware or Microsoft® Virtual Server. For more solutions visit: <http://www.hp.com/solutions/proliantdl580>.

High Performance Clusters

HP Cluster Platforms	HP Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters
HP HPC Interconnects	High Performance Computing (HPC) interconnect technologies are available for this server as part of the HP Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HP when integrated within an HP cluster. Flexible, validated solutions can be defined with the help of configuration tools. http://www.hp.com/techservers/clusters/ucp/index.html
HP Cluster Management Utility	HP Cluster Management Utility (CMU) is an HP-licensed and HP-supported suite of tools that are used to manage large-scale Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. http://www.hp.com/go/cmu
HP HPC Linux Value Pack	HP HPC Linux Value Pack (Value Pack) is an HP-licensed and HP-supported specially priced software bundle for the development and deployment of applications on HPC Cluster Platforms. Value Pack includes the Platform HPC Enterprise Edition suite of tools including the LSF workload scheduler, the HP-MPI parallelization library. Also included are the HP Unified Parallel C compiler and the HP Shmem library, as well as the execution environments for the libraries and compiler. HP HPC Linux Value Pack

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control

challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HP storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- **Data Protection and Recovery Software**
Whether you're a large enterprise or a smaller business, HP data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.
- **Data Archive and Migration Software**
HP's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.
- **Storage Resource Management Software (SRM)**
HP's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- **Data Replication Software**
HP offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- **Storage Device Management Software**
Maximize your investment in HP storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.
- **HP StoreVirtual VSA**
With HP StoreVirtual VSA you can use the power of virtualization to turn a set of heterogeneous and disconnected physical disk drives in your servers and storage devices into a single pool of logical storage capacity.

NOTE: For more information available Storage Software including QuickSpecs, please see: www.hp.com/go/storage/software.

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAXxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

HP Simple Configurator SCE is a guided self service tool to help sales and non technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. <http://www.hp.com/products/configurator>

contents

Overview	Standard Features	Optional Features	Service and Support	Pre-configured Models
Configuration Information - Factory	Integrated Models	Core Options	Additional Options	Memory
Storage	Power Specifications	Technical Specifications		

Service and Support

Service and Support

HP Technology Services for Industry Standard Servers and BladeSystem

Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best

- the experienced professionals at HP Services.

What HP ProLiant and BladeSystem Services can do for you

HP ProLiant and BladeSystem Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. This way, HP proposes services solutions that include more than just uplift of base warranty. You can get the support you need by choosing from one of a number of service packaged solutions we have designed to address wider set of customer support needs.:

HP Technology Services meets business challenges with services offered in three packages - **Optimized Care Package, Standard Care Package, and Basic Care Package** - available for each product group. Such packaged solutions enable customers to optimize technology operations, minimize risk and drive better business outcomes with easy-to-buy, easy-to-use scalable support packages for servers, storage, networking and software.

Optimized Care Package

Supports maintaining servers at optimum performance availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

HP Installation and Startup for SIM (Systems Insight Manager)

Provides for installation and configuration of the latest version of HP Systems Insight Manager, together with the installation and startup of HP Service Essentials Remote Support Pack

<http://h20195.www2.hp.com/v2/GetPDF.aspx/5982-4143EN.pdf>

3-Year HP Critical Advantage

Provides end-to-end infrastructure support solution for business critical applications running on virtualized/x86 infrastructures, enabling the customers to cost effectively build, operate, and continuously improve their IT environment

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA3-1772ENW>

Additional Services: Microsoft or Linux or VMware education courses + Facility & technology environmental assessment services + Energy Efficiency Design, Factory Express

Standard Care Package Package that maintains high level of server availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

HP Installation and Startup for SIM (Systems Insight Manager)

Provides for installation and configuration of the latest version of HP Systems Insight Manager, together with the installation and startup of HP Service Essentials Remote Support Pack

<http://h20195.www2.hp.com/v2/GetPDF.aspx/5982-4143EN.pdf>

3-Year HP 6 hour Hardware Support Onsite Call-to-Repair Service

Provides an IT manager with a team of support specialists who will quickly begin troubleshooting the system to help return the hardware to operating condition within 6 hours of the initial service request to the HP Global Solution Center

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EN.pdf>

3-Year , HP 24x7 Software Support for Insight Control

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6645EEE.pdf>

Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up, and Software Support; Install and Startup Services for Insight Control; Microsoft or Linux or VMware education courses; +30 Proactive Select Credits, Factory Express

Basic Care Package

Basic Care Package: delivers minimum recommended support service level

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf>

Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up and Software Support); +10 Proactive Select Credits, Factory Express

Insight Remote Support

The packages include HP Insight Remote Support that uses proven technology to deliver secure, reliable 24x7 remote monitoring, diagnoses, and problem resolution. It is available at no additional cost to all warranty, HP Care Pack Service, and service agreement customers.

For more information

To learn more on HP ProLiant servers and HP BladeSystem servers, please contact your HP sales representative or HP Authorized Channel Partner. Or visit:

<http://www.hp.com/services/proliant>

contents

[Overview](#) [Standard Features](#) [Optional Features](#) [Service and Support](#) [Pre-configured Models](#)
[Configuration Information - Factory Integrated Models](#) [Core Options](#) [Additional Options](#) [Memory](#)
[Storage](#) [Power Specifications](#) [Technical Specifications](#)

Pre-configured Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

NOTE: HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

NOTE: If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

High Performance Models

HP ProLiant DL580 G7 E7-4870 4P 128GB-R P410i/1G FBWC 4x1200W HE PS Server 643063-001	Processor(s)	(4) Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) Processors (4) Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) Processors
	Four of the following depending on model	
HP ProLiant DL580 G7 E7-4850 4P 128GB-R P410i/1G FBWC 4x1200W HE PS Server 643064-001	Cache Memory	30MB (1 x 30MB) Level 3 cache 24MB (1 x 24MB) Level 3 cache
	One of the following depending on model	
HP ProLiant DL580 G7 E7-4870 4P 128GB-R Hot Plug SAS SFF BC NIC 1200W PS Server 696729-001	Memory	128GB (16 x 8GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (8) (E7) Memory Cartridges (E7-4870, E7-4850 Models) 64GB (16 x 4GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (8) memory boards (X7560, X7550 Models) 32GB (8 x 4GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (4) memory boards (E7540 Models)
	One of the following depending on model	
HP ProLiant DL580 G7 E7-4850 4P 128GB-R Hot Plug SAS SFF BC NIC 1200W PS Server 696730-001	Network Controller	HP NC375i Integrated Quad Port Gigabit Server Adapter (643063-xx1 and 643064-xx1 Models) HP Ethernet 1Gb 4-port 331i Integrated Server Adapter (696729-xx1 and 696730-xx1 Models)
	Storage Controller	Embedded HP Smart Array P410i/1G FBWC Controller
	Hard Drives	None ship standard
	Internal Storage	Up to 8.0TB of internal storage (SFF SAS)
	Optical Drive	HP Slim SATA DVD ROM Optical Drive
	Power Supply	(4) HP 1200W Common Slot Platinum Hot Plug Power Supply Kit (E7-4870, E7-4850 Models)
	One of the following depending on model	
	Fans	Four Hot Plug redundant fans standard (3+1)

Integrated Lights Out	Integrated Lights-Out 3 (iLO 3) ships standard
Insight Control	HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates
Form Factor	Rack 4U
Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response

Base Models

HP ProLiant DL580 G7 E7-4830 2P 64GB-R P410i/512 FBWC 2x1200W HE PS Server 643065-001	Processor(s)	(2) Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) Processors (2) Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) Processors
	Two of the following depending on model Up to 4 supported	
HP ProLiant DL580 G7 E7-4807 2P 64GB-R P410i/512 FBWC 2x1200W HE PS Server 643066-001	Cache Memory	24MB (1 x 24MB) Level 3 cache
	One of the following depending on model	
HP ProLiant DL580 G7 E7-4830 2P 64GB-R Hot Plug SAS SFF BC NIC 1200W PS Server 696731-001	Memory	64GB (8 x 8GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (4) (E7) Memory Cartridges (E7-4830, E7-4807 Models)
	Network Controller	HP NC375i Integrated Quad Port Gigabit Server Adapter (643065-xx1 and 643066-xx1 Models) HP Ethernet 1Gb 4-port 331i Integrated Server Adapter (696731-xx1 and 696732-xx1 Models)
HP ProLiant DL580 G7 E7-4807 2P 64GB-R Hot Plug SAS SFF BC NIC 1200W PS Server 696732-001	Storage Controller	Embedded HP Smart Array P410i/512 MB FBWC Controller
	Hard Drives	None ship standard
	Internal Storage	Up to 8.0TB of internal storage (SFF SAS)
	Optical Drive	HP Slim SATA DVD ROM Optical Drive
	Power Supply	(2) HP 1200W Common Slot Platinum Hot Plug Power Supply Kit (E7-4830, E7-4807 Models)
	One of the following depending on model	
	Fans	Four Hot Plug redundant fans standard (3+1)
	Integrated Lights Out	Integrated Lights-Out 3 (iLO 3) ships standard
	Form Factor	Rack 4U
	Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response

contents

Overview	Standard Features	Optional Features	Service and Support	Pre-configured Models
Configuration Information - Factory Integrated Models	Core Options	Additional Options	Memory	
Storage	Power Specifications	Technical Specifications		

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

NOTE: NOTE: Factory Integrated Models must start with a CTO Server.

NOTE: FIO indicates that this option is only available as a factory installable option.

Step 1: Base Configuration

HP Models	HP ProLiant DL580 G7 (E7) Configure-to-order Server	643086-B21
	Factory Integrated Models ship with:	
	HP NC375i Integrated Quad Port Gigabit Server Adapter	
	Four HP DL580G7/DL980 G7 (E7) Memory Cartridges	
	Five standard PCI-express slots	
	HP Smart Array P410i/ Zero Memory Controller	
	Four redundant hot-plug fans	
	SFF SAS/SATA/SSD drive cage	
	HP Integrated Lights-Out 3 (iLO 3) management processor: integrated on system board	

Rack (4U), 7-inch

NOTE: Power supplies need to be selected separately from Step 2 below.

HP ProLiant DL580 G7 (E7) BC NIC Configure-to-order Server

643086-B22

Factory Integrated Models ship with:

HP Ethernet 1Gb 4-port 331i Integrated Server Adapter

Four HP DL580G7/DL980 G7 (E7) Memory Cartridges

Five standard PCI-express slots

HP Smart Array P410i/ Zero Memory Controller

Four redundant hot-plug fans

SFF SAS/SATA/SSD drive cage

HP Integrated Lights-Out 3 (iLO 3) management processor: integrated on system board

Rack (4U), 7-inch

NOTE: Power supplies need to be selected separately from Step 2 below.

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HP Processors

NOTE: If more than two processors are desired, select one xxxxxx-L21 and additional processors would be xxxxxx-B21. 3P configurations are not supported.

Ten-Core Processors

HP DL580 G7 Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) FIO 2-processor Kit

643067-L21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4860 (2.26GHz/10-core/24MB/130W) FIO 2-processor Kit

643069-L21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) FIO 2-processor Kit

643071-L21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-8867L (2.13GHz/10-core/30MB/105W) FIO 2-processor Kit

643079-L21

NOTE: QPI speed is 6.40 GT/s

Eight-Core Processors

HP DL580 G7 Intel® Xeon® E7-8837 (2.67GHz/8-core/24MB/130W) FIO 2-processor Kit

643081-L21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) FIO 2-processor Kit

643073-L21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4820 (2.0GHz/8-core/18MB/105W) FIO 2-processor Kit

643075-L21

NOTE: QPI speed is 5.86 GT/s

Six-Core Processors

HP DL580 G7 Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) FIO 2-processor Kit

643077-L21

NOTE: QPI speed is 4.80 GT/s

NOTE: Intel® Xeon® Processor E7-4800 series processors are supported only in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (PN 643086-B2x) and E7 series pre-configured models)

HP Memory

Registered DIMMs (RDIMMs)

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit

500656-B21

NOTE: Only supported with the Intel® Xeon® Processor 7500 series processors

HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit

500658-B21

HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit

604504-B21

HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500662-B21
HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604506-B21
HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit	500666-B21
HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit	627812-B21
HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit	627814-B21

NOTE: PC3L DIMMs are only supported with the Intel® Xeon® Processor E7 series processors and require (E7) memory cartridge.

NOTE: PC3L is a low-voltage memory.

Memory Expansion Options

HP DL580G7/DL980G7 (E7) Memory Cartridge	644172-B21
--	------------

NOTE: Four memory cartridges come standard in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (643086-B21), each kit contains one cartridge and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.

HP Power Supplies

NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at:

www.hp.com/go/hppoweradvisor.

HP 1200W Common Slot Silver Hot Plug Power Supply Kit	500172-B21
---	------------

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit	578322-B21
---	------------

NOTE: All power supplies in a server should match. Mixing Platinum and Silver Power Supplies is not supported.

NOTE: Option Kits contain optional power supply, an IEC power cable and PDU IEC cables.

NOTE: HP ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HP power cords please go to www.hp.com/products/powercords

Step 3: Choose Additional Factory Integratable Options

HP Insight Software	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License	C6N36A
---------------------	--	--------

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.

contents

Overview	Standard Features	Optional Features	Service and Support	Pre-configured Models
Configuration Information - Factory Integrated Models	Core Options	Additional Options	Memory	
Storage	Power Specifications	Technical Specifications		

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Unique Options	HP DL580 G7 PCI Express Kit	588137-B21
	NOTE: Adds four PCI-E 2.0 x8, one PCI-E 2.0 x4 and one PCI-E 1.1 x4.	
	HP DL580 G7 PCI-X Combo Express Kit	588139-B21
	NOTE: Adds two PCI-E 2.0 x16, one PCI-E 2.0 x4 and two PCI-X.	
	HP DL580G7/DL980G7 (E7) Memory Cartridge	644172-B21
	NOTE: Four memory cartridges come standard in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (643086-B21), each kit contains one cartridge and a maximum of (8) are supported in the server. See Memory Performance	

Optimization in the Memory section for configuration guidelines.

HP DL580G7/DL980G7 Memory Cartridge

588141-B21

NOTE: Each kit contains one memory board and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.

HP Processors

Ten-Core Processors

HP DL580 G7 Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) Processor Kit

643067-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4860 (2.26GHz/10-core/24MB/130W) Processor Kit

643069-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) Processor Kit

643071-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-8867L (2.13GHz/10-core/30MB/105W) Processor Kit

643079-B21

NOTE: QPI speed is 6.40 GT/s

Eight-Core Processors

HP DL580 G7 Intel® Xeon® E7-8837 (2.67GHz/8-core/24MB/130W) Processor Kit

643081-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) Processor Kit

643073-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4820 (2.0GHz/8-core/18MB/105W) Processor Kit

643075-B21

NOTE: QPI speed is 5.86 GT/s

Six-Core Processors

HP DL580 G7 Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) Processor Kit

643077-B21

NOTE: QPI speed is 4.80 GT/s

NOTE: Above processor kits contain one processor each.

NOTE: Intel® Xeon® Processor E7-4800 series processors only supported in the HP ProLiant DL580 G7 (E7) Configure-to-order Servers and E7 series pre-configured models.

HP Memory

Registered DIMMs (RDIMMs)

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit

500656-B21

NOTE: Only supported with the Intel® Xeon® Processor 7500 series processors.

HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit

500658-B21

HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit

604504-B21

HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit

500662-B21

HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit

604506-B21

HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit

500666-B21

HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit

627812-B21

HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit

627814-B21

NOTE: PC3L DIMMs are only supported with the Intel® Xeon® Processor E7 series processors and require (E7) memory cartridge.

NOTE: PC3L is a low-voltage memory.

Memory Expansion Options

HP DL580G7/DL980G7 (E7) Memory Cartridge 644172-B21

NOTE: Four memory cartridges come standard in the HP ProLiant DL580 G7 (E7) Configure-to-order Servers (643086-B21 or 643086-B22), each kit contains one cartridge and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.

HP DL580G7/DL980G7 Memory Cartridge 588141-B21

NOTE: Each kit contains one memory board and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.

HP Optical Drives

NOTE: Optical drives are ejectable.

HP Slim 12.7mm SATA DVD-RW Optical Drive 481043-B21

HP Slim 12.7mm SATA DVD-ROM Optical Drive 481041-B21

HP Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HP 1.2TB 6G SAS 10K SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive 693648-B21

HP 900GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive 619291-B21

HP 600GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive 581286-B21

HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive 581284-B21

HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive 507127-B21

HP 300GB 6G SAS 15K rpm SFF (2.5-inch) Hot Plug Enterprise 3 yr Warranty Hard Drive 627117-B21

HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive 512547-B21

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive 605835-B21

HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive 507610-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18004.www1.hp.com/products/quickspecs/12244_na/12244_na.html

SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 3G SATA 7.2K rpm SFF (2.5-inch) Hot Plug Midline 1yr Warranty Hard Drive 625609-B21

HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive 507750-B21

6G SAS ME Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives

HP 800GB 6G SAS Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Warranty Solid State Drive 690823-B21

HP 400GB 6G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream 3yr Warranty Solid State Drive 690821-B21

HP 200GB 6G SAS Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Warranty Solid State Drive 690819-B21

3G SATA MLC Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State

Drives

HP 400GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive	636597-B21
HP 200GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive	636595-B21
HP 100GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive	636593-B21

NOTE: Cable is not included for Non-hot plug Drives. SSD cable option kit sku: 661778-B21

6G SAS SLC Hot Plug Enterprise Performance Solid State Drives

HP 400GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive	632494-B21
HP 200GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive	632492-B21

6G SAS Hot Plug Enterprise Mainstream Solid State Drives

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/14038_na/14038_na.html

Hard Drive Cables

HP DL580/DL585/DL980 G7 SSD Cable Kit	661778-B21
---------------------------------------	------------

HP Networking

Gigabit Ethernet Adapters

HP NC112T PCI Express Gigabit Server Adapter	503746-B21
HP NC360T PCI-E Dual Port Gigabit Server Adapter	412648-B21
HP NC364T PCI-E Quad Port Gigabit Server Adapter	435508-B21
HP NC365T 4-port Ethernet Server Adapter	593722-B21
HP NC373F PCI-E Multifunction 1000SX Gigabit Svr Adapter	394793-B21
HP NC373T PCI-E Multifunction Gigabit Server Adapter	394791-B21
HP NC375T PCI Express Quad Port Gigabit Server Adapter	538696-B21
HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter	458492-B21
HP Ethernet 1Gb 4-port 331T Adapter	647594-B21
HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
HP Ethernet 1Gb 2-port 361T Adapter	652497-B21

10 Gigabit Ethernet Adapters

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

HP NC522SFP Dual Port 10GbE Gigabit Server Adapter	468332-B21
HP NC524SFP Dual Port 10GbE Module	489892-B21
HP NC523SFP 10Gb 2-port Server Adapter	593717-B21
HP NC550SFP Dual Port 10GbE Server Adapter	581201-B21
HP NC552SFP 10Gb 2-port Ethernet Server Adapter	614203-B21
HP 10 GbE PCI-e G2 Dual Port Network Interface Card	516937-B21
HP Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
HP Ethernet 10Gb 2-port 530T Adapter	656596-B21
HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs

HP InfiniBand

HP InfiniBand 4X QDR ConnectX-2 PCIe G2 Dual Port HCA	592520-B21
HP InfiniBand 4X DDR ConnectX-2 PCIe G2 Dual Port HCA	592521-B21
QLogic InfiniBand 4X QDR PCI-E G2 Dual Port HCA	583211-B21
HP InfiniBand FDR/EN 10/40Gb Dual Port 544QSFP Adapter	649281-B21

NOTE: Please see the QuickSpecs for additional information:

HP I/O Expansion Options	HP DL580 G7 PCI Express Kit	588137-B21
	NOTE: Adds four PCI-E 2.0 x8, one PCI-E 2.0 x4 and one PCI-E 1.1 x4.	
	HP DL580 G7 PCI-X Combo Express Kit	588139-B21
	NOTE: Adds two PCI-E 2.0 x16, one PCI-E 2.0 x4 and two PCI-X	
	Suggested Slot placement:	
	1. Slot 3 PCIe2 x 16 (16,8,4,2,1)	
	2. Slot 6 PCIe2 x 16 (16,8,4,2,1)	
	3. Slot 9 PCIe2 x 16 (8,4,2,1)	
	4. Slot 11 PCIe2 x 16 (8,4,2,1)	
	NOTE: Slot 9 and 11 are physically a x16 slot but will operate electrically at x8.	

HP Power Supplies	NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor .	
	HP 1200W Common Slot Silver Hot Plug Power Supply Kit	500172-B21
	HP 1200W Common Slot Platinum Hot Plug Power Supply Kit	578322-B21
	NOTE: All power supplies in a server should match. Mixing Platinum and Silver Power Supplies is not supported.	
	NOTE: Option Kits contain optional power supply, an IEC power cable and PDU IEC cables.	
	NOTE: HP ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HP power cords please go to www.hp.com/products/powercords	

contents

Overview	Standard Features	Optional Features	Service and Support	Pre-configured Models
Configuration Information - Factory	Integrated Models	Core Options	Additional Options	Memory
Storage	Power Specifications	Technical Specifications		

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Insight Software	HP Insight Control	
	HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License	C6N27A
	HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License	C6N28AAE
	HP Insight Control Server Provisioning Media Kit	BD883A
	HP Insight Management Media Kit	C6N31A
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Electronic License	C6N36AAE
	HP Insight Control Server Deployment including 1yr 24x7 Support Electronic License	T9082AAE
	HP Insight Control Server Deployment including 1yr 24x7 Support Single Server License	452151-B21
	NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.	
	NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.	
	NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at:	

<http://www.hp.com/go/insightupdates>.

NOTE: For additional license options please see the QuickSpecs at:
http://h18000.www1.hp.com/products/quickspecs/12631_na/12631_na.html

HP Integrated Lights-Out (iLO) Advanced for ProLiant

HP iLO Advanced including 1yr 24x7 Technical Support and Updates Electronic License	TA850AAE
---	----------

HP iLO Advanced Electronic License with 3yr 24x7 Tech Support and Updates	BD506AAE
---	----------

HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License	512485-B21
--	------------

HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates	BD505A
---	--------

NOTE: For additional license options please see the QuickSpecs at:
http://h18004.www1.hp.com/products/quickspecs/14276_na/14276_na.html

NOTE: For more information, visit: <http://www.hp.com/go/ilo>

High Performance Clusters

HP Cluster Management Utility

HP Insight Cluster Management Utility 1yr 24x7 Flexible License	QL803B
---	--------

NOTE: This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.

HP Insight Cluster Management Utility 3yr 24x7 Flexible License	BD476A
---	--------

NOTE: These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.

HP Insight Cluster Management Utility Media	BD477A
---	--------

NOTE: For additional license kits please see the QuickSpecs at:
http://h18004.www1.hp.com/products/quickspecs/12612_na/12612_na.html

HP HPC Linux Value Pack

HP High Performance Computing Linux Value Pack 1 Processor Flexible License for ProLiant Servers	TC293B
--	--------

NOTE: This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one socket (a.k.a. processor). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.

HP High Performance Computing Linux Value Pack Media Kit for ProLiant Servers	TC294A
---	--------

NOTE: This part number can be used to purchase media including software and documentation, which will be delivered to the customer.

NOTE: For additional license kits please see the QuickSpecs at:
http://h18004.www1.hp.com/products/quickspecs/13485_na/13485_na.html

HP I/O Accelerator Options

Second Generation Accelerators

HP 365GB Multi Level Cell G2 PCIe ioDrive2 for ProLiant Servers	673642-B21
---	------------

HP 785GB Multi Level Cell G2 PCIe ioDrive2 for ProLiant Servers	673644-B21
---	------------

HP 1205GB Multi Level Cell G2 PCIe ioDrive2 for ProLiant Servers	673646-B21
--	------------

HP 2410GB Multi Level Cell G2 PCIe ioDrive2 Duo for ProLiant Servers	673648-B21
--	------------

First Generation Accelerators

HP 160GB Single Level Cell PCIe ioDrive for ProLiant Servers	600278-B21
--	------------

NOTE: A low-profile PCI bracket is included for use in low-profile slots.

HP 320GB Single Level Cell PCIe ioDrive Duo for ProLiant Servers	600281-B21
--	------------

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13587_na/13587_na.html

HP Graphics Options	<p>HP DL580/DL585/DL980 G7 Power Cable Kit</p> <p>NOTE: The HP ProLiant DL580 G7 can support up to 4 (225W) or 3(300W) Graphic Cards and/or GPGPU Accelerator Options (x16 PCIe add-in cards in slots 11 and 9 will down-train electrically to x8 PCIe which may result in reduced performance.)</p> <p>NOTE: An option kit will be required per Graphic Card and/or GPGPU Accelerator Options.</p> <p>NOTE: Depending on the number of GPGPUs required, customers will need to purchase the following I/O expansion boards: DL580G7 PCI-X / PCI Express I/O Exp. Kit: PN: 588139-B21 (Adds two PCI-E 2.0 x16, one PCI-E 2.0 x4 and two PCI-X).</p>	631660-B21
HP Security	<p>HP Trusted Platform Module Option</p> <p>NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM.</p> <p>NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.</p> <p>NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.</p>	488069-B21
HP Storage Controllers SAS Controllers		
Smart Array P212 Controller		
HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller		462828-B21
HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 SAS Controller		462834-B21
Smart Array P410 Controller		
HP Smart Array P410/256 2-ports Int PCIe x8 SAS Controller		462862-B21
HP Smart Array P410/512 BBWC 2-ports Int PCIe x8 SAS Controller		462864-B21
HP Smart Array P410/512 FBWC 2-ports Int PCIe x8 SAS Controller		578230-B21
HP Smart Array P410/1G FBWC 2-ports Int PCIe x8 SAS Controller		572532-B21
Smart Array P411 Controller		
HP Smart Array P411/256 2-ports Ext PCIe x8 SAS Controller		462830-B21
HP Smart Array P411/512 BBWC 2-ports Ext PCIe x8 SAS Controller		462832-B21
HP Smart Array P411/1G FBWC 2-ports Ext PCIe x8 SAS Controller		572531-B21
HP Smart Array P411/512 FBWC 2-ports Ext PCIe x8 SAS Controller		578229-B21
Smart Array P812 Controller		
HP Smart Array P812/1G FBWC 2-ports Int/4-ports Ext PCIe x8 SAS Controller		487204-B21
Optional Upgrades		
HP 512MB P-Series Battery Backed Write Cache Upgrade		462967-B21
NOTE: Supported on HP Smart Array P411 Controller only.		
HP 1GB Flash Backed Cache		534562-B21
HP 512MB Flash Backed Write Cache		534916-B21
HP 256MB P-series Cache Upgrade		462968-B21
HP Smart Array Advanced Pack including 1yr 24x7 Technical Support and Updates Single Server License		516471-B21
<p>NOTE: This part number can be used to purchase a single license or to order multiple licenses with a single activation key. Customers will receive a license entitlement certificate via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Include one year of 24x7 HP Software Technical Support Services.</p>		

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13203_na/13203_na.html

(Smart Array P212 Controller)

http://h18000.www1.hp.com/products/quickspecs/13201_na/13201_na.html

(Smart Array P410 Controller)

http://h18000.www1.hp.com/products/quickspecs/13202_na/13202_na.html

(Smart Array P411 Controller)

http://h18000.www1.hp.com/products/quickspecs/13558_na/13558_na.html

(Smart Array P812 Controller)

http://h18000.www1.hp.com/products/quickspecs/13200_na/13200_na.html

(Smart Array Advanced Pack)

SAS HBA

HP Modular Smart Array SC08e 2-ports Ext PCIe x8 SAS Host Bus Adapter

614988-B21

NOTE: This is a 2 x4 External Port HBA

NOTE: This is only approved for the HP P2000 G3 SAS Modular Smart Array.

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18004.www1.hp.com/products/quickspecs/13651_na/13651_na.html

(SC08e 6Gb HBA)

SCSI HBA

HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter

412911-B21

NOTE: Recommended HBA for SCSI tape drive connect.

NOTE: Please see the following QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/12566_na/12566_na.html

(SC11Xe HBA)

HP Power Cords

HP C13 - NA/Jpn 10Amp 1.83m Power Cord

AF556A

HP C13 - C14 redundant 2m 10Amp Jumper Cord

AF573A

HP Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HP tape backup products see: <http://www.hp.com/storage/SPOCK> and www.hp.com/go/ebs.

NOTE: For Internal drives to be connected to DL servers please make sure that you order rack mount kit as well.

HP StoreEver LTO-3 Ultrium 920 SAS Internal Tape Drive

EH847B

NOTE: For installation into 1U SAS rack kit (AE459B) or 3U SAS rack kit (AG576B). No peripheral bay available for installation into the server. Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.

HP StoreEver LTO-4 Ultrium 1840 SAS External Tape Drive

EH861B

HP StoreEver LTO-5 Ultrium 3280 SAS Internal Tape Drive

EH899B

NOTE: For installation into 3U SAS rack kit (AG576B). No peripheral bay available for installation into the server. Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.

HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit

C0L99A

HP StoreEver LTO-6 Ultrium 6650 Internal Tape Drive

EH963A

HP StoreEver LTO-6 Ultrium 6650 External Tape Drive

EH964A

HP StoreEver LTO-6 Ultrium 6250 Internal Tape Drive

EH969A

HP StoreEver LTO-6 Ultrium 6250 External Tape Drive

EH970A

HP Disk Backup

NOTE: For the complete range of D2D Backup Systems see:

<http://www.hp.com/go/d2d>. For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk backup products see: <http://www.hp.com/storage/SPOCK>.

HP D2D Backup Systems with Backup Data Deduplication

HP StoreOnce D2D2504i Backup System

EJ002C

HP StoreOnce D2D4112 Backup System

EH993C

HP RDX Removable Disk Backup Systems USB

HP RDX500 USB3.0 Internal Disk Backup System	B7B64A
--	--------

HP RDX1000 USB3.0 Internal Disk Backup System	B7B67A
---	--------

HP StoreOnce Backup systems

HP StoreOnce 2620 iSCSI Backup	BB852A
--------------------------------	--------

HP StoreOnce 4220 Backup	BB855A
--------------------------	--------

HP Storage Options**Storage Fibre Channel HBA**

NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see: <http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

Brocade Fibre Channel HBAs

HP 81B 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AP769B
---	--------

HP 82B 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AP770B
---	--------

HP 41B 4Gb 1-port PCIe Fibre Channel Host Bus Adapter	AP767B
---	--------

HP 42B 4Gb 2-port PCIe Fibre Channel Host Bus Adapter	AP768B
---	--------

Emulex Fibre Channel HBAs

HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AJ762B
---	--------

HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ763B
---	--------

HP FC2142SR 4Gb 1-port PCIe Fibre Channel Host Bus Adapter	A8002B
--	--------

HP FC2242SR 4Gb 2-port PCIe Fibre Channel Host Bus Adapter	A8003B
--	--------

HP SN1000E 16Gb 2-port PCIe Fibre Channel Host Bus Adapter	QR559A
--	--------

HP SN1000E 16Gb 1-port PCIe Fibre Channel Host Bus Adapter	QR558A
--	--------

QLogic Fibre Channel HBAs

HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AK344A
---	--------

HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ764A
---	--------

HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter	QW971A
--	--------

HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter	QW972A
--	--------

HP FC1142SR 4Gb 1-port PCIe Fibre Channel Host Bus Adapter	AE311A
--	--------

HP FC1242SR 4Gb 2-port PCIe Fibre Channel Host Bus Adapter	AE312A
--	--------

Converged Network Adapter

HP CN1100E Dual Port Converged Network Adapter	BK835A
--	--------

HP CN1000Q Dual Port Converged Network Adapter	BS668A
--	--------

HP Disk Storage Systems**Disk Enclosures**

HP D2600 Disk Enclosure	AJ940A
-------------------------	--------

HP D2700 Disk Enclosure	AJ941A
-------------------------	--------

NOTE: Please see the QuickSpecs for additional options and configuration information at:

http://h18000.www1.hp.com/products/quickspecs/13404_na/13404_na.html

HP Uninterruptible Power Systems**HP Rack-mountable UPS****HP R1500 G3 Uninterruptible Power Supply (UPS)**

HP R1.5kVA G3 1U NA Uninterruptible Power System	AF469A
--	--------

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14059_na/14059_na.html

HP R/T3000 G2 Uninterruptible Power System (UPS)

HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System	AF466A
--	--------

HP R/T3000 G2 2U L620 High Voltage NA/JP Uninterruptible Power System	AF467A
---	--------

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14058_na/14058_na.html

R5000 Uninterruptible Power System (UPS)

HP R5KVA 3U L630 High Voltage NA/JP Uninterruptible Power System	AF460A
--	--------

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14109_na/14109_na.html

R7000 Uninterruptible Power System (UPS)

HP R7KVA 4U 50A High Voltage NA/JP Uninterruptible Power System AF462A

HP R5KVA and R7KVA 3U Extended Runtime Module AF464A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14110_na/14110_na.html
(Worldwide)

HP Rackmountable 3 Phase Uninterruptible Power Systems (UPS R8000/3 and R12000/3)

HP R8000/3 8000kVA Three Phase NA 6U Rackmount Uninterruptible Power System AF431A

HP R12000/3 12000VA Three Phase NA 6U Rackmount Uninterruptible Power System AF429A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/12857_na/12857_na.html

NOTE: For additional information on HP Uninterruptible Power Systems please go to: www.hp.com/servers/rackups.

NOTE: For additional information on sizing your server, please reference: <http://www.upssizer.com>.

NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.

HP Power Distribution Units

HP Monitored Power Distribution Unit: Full Rack Version

HP 8.6kVA 24A Single Input Three Phase NA/JP Monitored Power Distribution Unit AF504A

HP 16.6kVA 40A Dual Input Single Phase NA/JP Monitored Power Distribution Unit AF505A

HP 8.3kVA 40A Single Input Single Phase NA/JP Monitored Power Distribution Unit AF506A

NOTE: Please see the following QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/12118_na/12118_na.htm

HP Monitored Power Distribution Unit: Half Rack Version

HP 4.9kVA 24A Single Input Single Phase NA/JP Monitored Power Distribution Unit AF914A

Modular Power Distribution Units 1U/0U (Up to 32 outlets)

NOTE: 1U/0U mounting brackets shipped with the unit (optimized for 10000 and 9000 series racks).

HP 2.8kVA 24A Low Voltage NA/JP Modular Power Distribution Unit 252663-D71

HP 4.9kVA 24A High Voltage NA/JP Modular Power Distribution Unit 252663-D72

HP 8.3kVA 40A High Voltage NA/JP Modular Power Distribution Unit 252663-D73

NOTE: Please see the following QuickSpecs for additional options including shorter jumper cables and country specific power cords:

http://h18000.www1.hp.com/products/quickspecs/11041_na/11041_na.html

NOTE: For additional information on HP Power Distribution Units including accessories please go to: www.hp.com/go/pdu.

NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.

HP Intelligent Power Distribution Units (iPDU)

iPDU Core Units

HP 4.9kVA 24A Single Phase Core Intelligent Modular Power Distribution Unit AF520A

HP 8.3kVA 40A Single Phase Core Intelligent Modular Power Distribution Unit AF521A

HP 8.6kVA 24A Three Phase Core Intelligent Modular Power Distribution Unit AF522A

	HP 14.4kVA 40A Three Phase Intelligent Modular Power Distribution Unit	AF533A
	HP 17.3kVA 48A Three Phase Core Intelligent Modular Power Distribution Unit	AF523A
	HP 11.4kVA 16A 415V Three Phase L22-20 Core Intelligent Power Distribution Unit	AF900A
	HP 17.3kVA 24A 415V Three Phase L22-30 Core Intelligent Power Distribution Unit	AF902A
	HP 17.3kVA 24A 415V Three Phase IEC309 Core Intelligent Power Distribution Unit	AF901A
	HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF535A
	HP 17.3kVA 24A 415V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF537A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13650_na/13650_na.html	
HP Intelligent Power Distribution Units (iPDU)	iPDU Core Units	
	HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF520A
	HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF522A
	iPDU Extension Bars	
	HP 5xC13 Intelligent PDU Extension Bar G2 Kit	AF547A
	HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar	AF528A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13650_na/13650_na.html	
HP Rack Options	HP Server Console Switches	
	HP Server Console 0x2x8 Port Analog Switch	AF616A
	HP Server Console 0x2x16 Port Analog Switch	AF617A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/11834_na/11834_na.html	
	HP Server Console Switch G2 with Virtual Media & CAC	
	HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
	HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF619A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13475_na/13475_na.html	
	HP IP Console Switch G2 with Virtual Media & CAC	
	HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
	HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
	HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13474_na/13474_na.html	
HP USB and SD Options	HP USB 04 Standard Keyboard	DT528A#ABA
	HP 4GB SD Enterprise Performance Flash Media Kit	580387-B21
	NOTE: Blank SD media device is supported for use with VMware and Citrix. SD media must be installed in the internal slot of the ProLiant server. Learn more at: http://www.hp.com/go/proliantvirtualization .	
	HP 2GB USB Flash Media Drive Key Kit	608447-B21
	NOTE: HP qualified blank USB key for use with HP ProLiant servers that support the VMware virtualization environment and other HP value-add software. HP recommends this industry standard USB flash device for use with	

VMware ESXi. USB device must be installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to [HP VMware Getting Started Guide](#) for installation instructions.

HP Care Pack Services Proactive Care

NOTE: Collaborative Support plus Proactive services delivered by the onshore, local language Advanced Solution Center (ASC), end-to-end case ownership from a Technical Solution Specialists and Technical Account Manager who remotely delivers firmware/software revision management, proactive scans and incident trend reports. Recommended for customers running a virtualized infrastructure and/or customers who desire an enhanced call support experience.

HP 3 year 4 hour 24x7 ProLiant DL58x Proactive Care Service U2Z68E

HP 3 year 4 hour 24x7 with Defective Media Retention ProLiant DL58x Proactive Care Service U2Z71E

HP 3 year 6 hour Call To Repair 24x7 ProLiant DL58x Proactive Care Service U2Z74E

HP 3 year 6 hour Call To Repair 24x7 with Defective Media Retention ProLiant DL58x Proactive Care SVC U2Z77E

Collaborative Support

NOTE: Hardware break/fix plus 24x7 software diagnosis support with collaborative call management for a broad spectrum of 3rd Party software products including O/S and hypervisors. Recommended for customers procuring 3rd party SW O/S and hypervisors from the software vendors directly and deploying them on HP ProLiant servers.

HP 3 year 4 hour 24x7 ProLiant DL58x Collaborative Support U1J48E

HP 3 year 4 hour 24x7 with Defective Media Retention ProLiant DL58x Collaborative Support U1J51E

HP 3 year 6 hour Call To Repair 24x7 ProLiant DL58x Collaborative Support U1J54E

HP 3 year 6hr Call To Repair 24x7 with Defective Media Retention ProLiant DL58x Collaborative Support U1J57E

Proactive Care Personalized Support Option

NOTE: To add an onsite Account Support Manager (ASM) to Proactive Care. ASM is an assigned resource who delivers support planning and brings technical expertise and best practices advices for the customer's environment.

HP 3yr Provides annual personalized proactive supp for existing Proactive Care ISS centric environmt U6W98E

Installation Services

NOTE: Reduce the time required to get your system up and running and help minimize disruptions to your business.

HP 3 year 4 hour 24x7 ProLiant D58x Hardware Support U4608E

HP Install ProLiant DL58x Service U4617E

HP Startup ProLiant DL58x Service U4618E

HP Installation and Startup for Insight Control Server Deployment - previously Rapid Deployment Pack U5683E

NOTE: For more information, customer/resellers can contact:

<http://www.hp.com/services/carepack>

contents

Overview	Standard Features	Optional Features	Service and Support	Pre-configured Models
Configuration Information - Factory Integrated Models	Core Options	Additional Options	Memory	
Storage	Power Specifications	Technical Specifications		

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

HP ProLiant DL580 G7

Memory Subsystem Architecture

Intel® Xeon® processor E7 and 7500 series memory architecture is designed to take advantage of multiple stages of memory interleaving to reduce latency and increase bandwidth.

Each processor contains two Memory Controllers as shown in the Processor/Memory interconnect figure below. Each Memory controller has two Scalable Memory Interface (SMI) buses operating in lockstep where each SMI bus connects to a memory buffer. The purpose of the buffer is to convert SMI to DDR3. Each buffer has two DDR3 channels and can support up to four DIMMs for a total of eight DIMMs per cartridge.

- Memory speed is not affected by number of DIMMs or ranks. All DIMMs will run at the highest possible speed for a given processor.
- DDR3 memory speed is a function of the processors QPI bus speed such that
 - Processors with a QPI speed of 6.4GT will run memory at 1066MHz
 - Processors with a QPI speed of 5.6GT will run memory at 978MHz
 - Processors with a QPI speed of 4.8GT will run memory at 800 MHz

DIMM Installation guidelines

Each memory cartridge can support up to 8 DIMMs, for a system total of 64 DIMMs. When installing DIMM modules in the Memory Cartridge observe the following minimum guidelines:

- UDIMMs are not supported
- Minimum allowable configuration is two DIMMs per cartridge.
- DIMMs must be installed in pairs with identical characteristics. For configuration simplicity HP recommends using identical part numbered DIMMs throughout when possible.
- DIMM pairs MUST be populated in sequence by letter designation. Install DIMM pair 1A, 8A first followed by DIMM pair 3B, 6B then DIMM pair 2C, 7C and DIMM pair 4D, 5D last.
- Maximum performance is achieved by balancing DIMM pairs by letter groupings across all memory cartridges. Such that the 1A, 8A pair is install in all memory cartridges first (see diagram below) followed by the B pair, C pair and D pair.
- AMP modes Online Sparing and Memory Mirroring have further requirements beyond these listed here. Please refer to the user guide for additional memory configuration requirements.

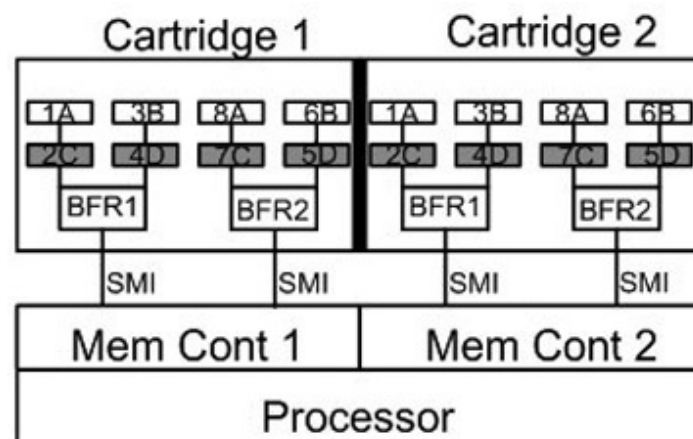


Figure 1 Processor/Memory interconnect

Illustration of how the processor, cartridges and DIMMs are electrically connected.

Memory Cartridge population guidelines

This server contains 8 memory cartridge slots in the processor memory drawer. Observe the following guidelines:

- Populate memory cartridge slots for a processor only if the processor is installed where:
 - Processor 1 connects to cartridge slots 1 and 2.
 - Processor 2 connects to cartridge slots 3 and 4.
 - Processor 3 connects to cartridge slots 5 and 6.
 - Processor 4 connects to cartridge slots 7 and 8.
- Minimum recommended cartridge population is one cartridge per processor. For best performance two cartridges per processor are recommended.
- Processors installed without corresponding memory cartridges will incur high memory access latencies and is not recommended.
- To maximize performance in multi-processor configurations distribute the total memory capacity evenly between all processors.

Hemisphere mode

The architecture incorporates hemisphere mode, a high performance interleaving technology. Hemisphere mode allows interleaving between the two processor memory controllers internal to each processor.

Hemisphere mode is enabled when all processors in a system have the memory behind both memory controllers populated identically.

- To enable each processor to enter hemisphere mode it must have both cartridges installed, populated with equal memory capacities and follow the DIMM installation guidelines.

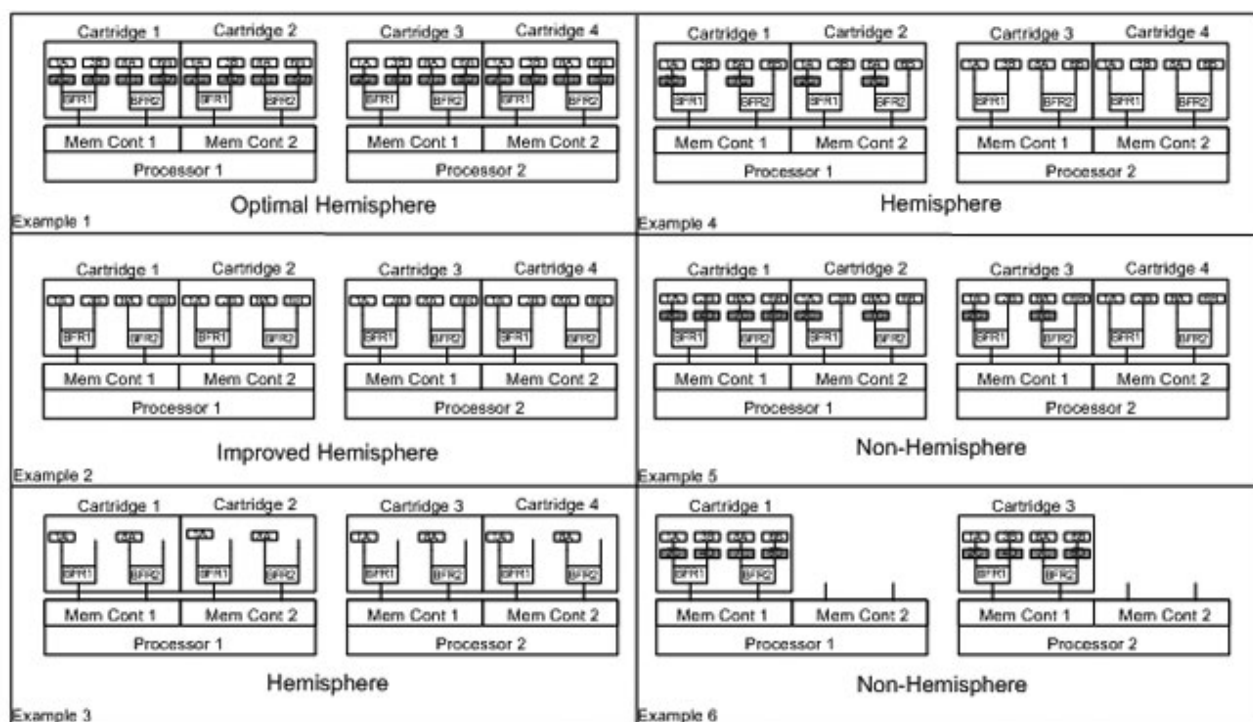


Figure 2 Hemisphere Population Diagram

Examples of Hemisphere vs Non-Hemisphere populations.

Memory Performance Optimization

The DL580 G7 supports 64 DIMMs across four multi-core processors. While there are many DIMM population configurations that can support any desired total memory size, optimal performance can only be achieved when DIMMs are populated to take advantage of the architecture. Reference the Figure: Hemisphere Population Diagram to achieve the best performance for a given memory/processor configuration.

- The largest contributor to maximum memory bandwidth performance is to utilize both memory controllers inside the processor. This is achieved by populating both memory cartridges for each installed processor.
- The second largest contributor to performance is to populate each DDR3 channel in each memory cartridge. To achieve this, the minimum DIMM count per cartridge is four. Maximum bandwidth is reached by fully populating all memory cartridges with the maximum number of eight DIMMs per cartridge.
- Best performance is obtained when all installed processors are enabled for Hemisphere mode. HP recommends two memory boards per processor- each one with at least 4 DIMMs- for improved memory bandwidth
- Hemisphere mode is optimum when four or eight DIMMs are installed per cartridge. Hemisphere mode can be reached with two or six DIMMs per cartridge (2 cartridges per processor) but it is not optimal configuration for Hemisphere mode.
- Plan your memory configurations using Identical DIMMs to reach your memory size target taking into account that 32 and 64 DIMM count configurations result in the highest performance. For a 4 processor example:
 - If initial memory target is 64GB then populate a 4 processor system with eight cartridges of 4 - 2GB DIMMs each for a total of 32 DIMMs. Your maximum expansion target is 128GB with 64 2GB DIMMs.
 - For 4GB DIMMs your initial memory target is 128GB using 32 DIMMs. Your maximum expansion target is 256GB with 64 DIMMs.
 - For 8GB DIMMs your initial memory target is 256GB using 32 DIMMs. Your maximum expansion target is 512GB with 64 DIMMs.
 - Maximum system memory capability is reached with an initial memory target of 512GB with 32 - 16GBDIMMs and 2TB with 64 32GB DIMMs.
- The more ranks per DIMM the higher the performance such that Quad rank DIMMs perform better than dual rank DIMMs.

NOTE: Memory configurations listed do not apply to "Factory Integrated Models". Only registered (RDIMM) speeds of 1066 or 1333 running at 1066 are supported and must be installed in pairs. UDIMMs are not supported.

Memory Kit

NOTE: Only supported with the Intel® Xeon® Processor 7500 series processors

HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500658-B21
HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604504-B21
HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500662-B21
HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604506-B21
HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit	500666-B21
HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit	627812-B21
HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit	627814-B21

NOTE: PC3L DIMMs are only supported with the Intel® Xeon® Processor E7 series processors and require (E7) memory cartridge.

NOTE: PC3L is a low-voltage memory.

Memory Expansion Options


HP DL580G7/DL980G7 (E7) Memory Cartridge	644172-B21
--	------------

NOTE: Four memory cartridges come standard in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (643086-B21), each kit contains one cartridge and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.

contents

Overview	Standard Features	Optional Features	Service and Support	Pre-configured Models
Configuration Information - Factory	Integrated Models	Core Options	Additional Options	Memory
Storage	Power Specifications	Technical Specifications		

Storage

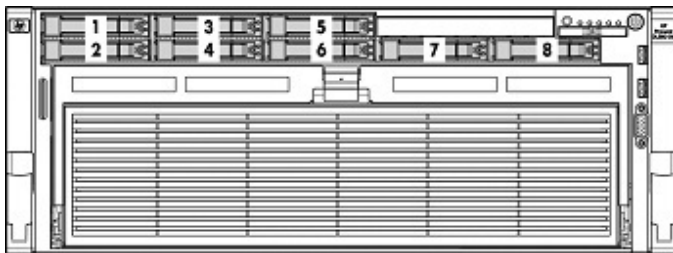

1-8 SFF SAS Internal Drive cage

Drive Support

	Quantity Supported	Position Supported	Controller
Optical Drives			
Slimline DVD-ROM drive	Up to 1	1	Integrated SATA
HP Slim SATA DVD RW Optical Drive	Up to 1	1	Integrated SATA

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
1.2TB 6G SAS 10K	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller
900GB 6G SAS 10K			HP Smart Array P212/256 MB Controller
600GB 6G SAS 10K			HP Smart Array P410/256 MB Controller
450GB 6G SAS 10K			HP Smart Array P410/512 MB BBWC Controller
300GB 6G SAS 10K			HP Smart Array P410/512 MB FBWC Controller
300GB 6G SAS 15K			HP Smart Array P410/1G FBWC Controller
146GB 6G SAS 15K			HP Smart Array P411/256MB Controller
			HP Smart Array P411/512MB with BBWC Controller
			HP Smart Array P411/512MB Flash Backed Write Cache
			HP Smart Array P411/1G Flash Backed Write Cache
			HP Smart Array P812/1G Flash Backed Cache Controller

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB 6G SAS 7.2K	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller
500GB 6G SAS 7.2K			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller
			HP Smart Array P410/512 MB FBWC Controller
			HP Smart Array P410/1G FBWC Controller
			HP Smart Array P411/256MB Controller
			HP Smart Array P411/512MB with BBWC Controller
			HP Smart Array P411/512MB Flash Backed Write Cache
			HP Smart Array P411/1G Flash Backed Write Cache
			HP Smart Array P812/1G Flash Backed Cache Controller

SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB 3G SATA 7.2K	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller
500GB 3G SATA 7.2K			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller
			HP Smart Array P410/512 MB FBWC Controller
			HP Smart Array P410/1G FBWC Controller
			HP Smart Array P411/256MB Controller
			HP Smart Array P411/512MB with BBWC Controller
			HP Smart Array P411/512MB Flash Backed Write Cache
			HP Smart Array P411/1G Flash Backed Write Cache
			HP Smart Array P812/1G Flash Backed Cache Controller

SATA Hot Plug 2.5" Enterprise Mainstream Solid State Drives

	Quantity Supported	Position Supported	Controller
400GB 3.0G SATA SSD	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller
200GB 3.0G SATA SSD			HP Smart Array P212/256 MB Controller
100GB 3.0G SATA SSD			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller
			HP Smart Array P410/512 MB FBWC Controller
			HP Smart Array P410/1G FBWC Controller
			HP Smart Array P411/256MB Controller
			HP Smart Array P411/512MB with BBWC Controller
			HP Smart Array P411/512MB Flash Backed Write Cache
			HP Smart Array P411/1G Flash Backed Write Cache
			HP Smart Array P812/1G Flash Backed Cache Controller

6G SAS Hot Plug Enterprise Mainstream Solid State Drives

Quantity Supported	Position Supported	Controller
--------------------	--------------------	------------

800GB 6G SAS MLC SFF	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller
400GB 6G SAS MLC SFF			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller
			HP Smart Array P410/512 MB FBWC Controller
			HP Smart Array P410/1G FBWC Controller
			HP Smart Array P411/256MB Controller
			HP Smart Array P411/512MB with BBWC Controller
			HP Smart Array P411/512MB Flash Backed Write Cache
			HP Smart Array P411/1G Flash Backed Write Cache
			HP Smart Array P812/1G Flash Backed Cache Controller

6G SAS Hot Plug Enterprise Performance Solid State Drives

	Quantity Supported	Position Supported	Controller
400GB 6G SAS SLC SFF	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller
200GB 6G SAS SLC SFF			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller
			HP Smart Array P410/512 MB FBWC Controller
			HP Smart Array P410/1G FBWC Controller
			HP Smart Array P411/256MB Controller
			HP Smart Array P411/512MB with BBWC Controller
			HP Smart Array P411/512MB Flash Backed Write Cache
			HP Smart Array P411/1G Flash Backed Write Cache
			HP Smart Array P812/1G Flash Backed Cache Controller

External Storage

	Quantity Supported	Position Supported	Host Controller or Adapter
D2600 Disk Enclosure	Up to 8	External	HP Smart Array P411/256MB BBWC Controller
			HP Smart Array P411/512 MB BBWC Controller
			HP Smart Array P812/1G Flash Backed Cache Controller
D2700 Disk Enclosure	Up to 4	External	HP Smart Array P411/256 MB Controller
			HP Smart Array P411/512 MB BBWC Controller
			HP Smart Array P812/1G Flash Backed Cache Controller

Maximum Storage Capacity - (External SAS Enclosure Attached)

Internal	9.6TB (8 x 1.2TB SFF SAS/SATA Drives)
External	960TB (80 MSA60 enclosures x 12 drive bays each x 1TB SATA Drives)

Tape and Disk-Based Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media, including the internal fitting models, see: <http://www.hp.com/go/tape>. For the complete range of D2D Backup Systems see: <http://www.hp.com/go/d2d>. For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk and tape backup products see: <http://www.hp.com/storage/SPOCK>.

	Position	Recommended Controller	Controller Part Number
HP SCSI Tape Drives	External	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
LTO-1 Ultrium 232			
LTO-2 Ultrium 448			
LTO-3 Ultrium 920			
LTO-3 Ultrium 960			
LTO4 Ultrium 1760			
LTO-4 Ultrium 1840			
DAT 40			
DAT 72			
DAT 160			
1U Rack-Mount Kit			
3U Rack-Mount Kit			

HP USB Tape Drives DAT 40 DAT 72 DAT 160 DAT 320 1U USB Rack-Mount Kit	External	USB 2.0 Port	N/A
HP SAS Tape Drives DAT 160 DAT 320 LTO-2 Ultrium 448 LTO-3 Ultrium 920 LTO-4 Ultrium 1760 LTO-4 Ultrium 1840 LTO-5 Ultrium 3000 LTO-5 Ultrium 3280 1U Rack-Mount Kit 3U Rack-Mount Kit	External	HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller	462828-B21
HP SCSI Tape Autoloaders DAT 72x10 Autoloader 1/8 G2 Autoloader	External	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
HP SCSI Tape Libraries, External MSL2024 MSL4048 MSL8096 MSL6000	External	HP U320e SCSI Dual Channel Host Bus Adapter	AH627A
HP SAS Tape Autoloaders and Libraries 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096	External	HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller	462828-B21
HP Fibre Channel Tape Libraries MSL2024 MSL4048 MSL8096 MSL6000	External	Please consult the EBS connectivity matrix at: http://www.hp.com/go/ebs for connectivity information and the supported Fibre Channel HBAs shown in this QuickSpec.	
HP USB RDX Removable Disk Backup System RDX160 RDX320 RDX500 RDX750 RDX1TB	External	USB 2.0 port	N/A
HP D2D Backup Systems, iSCSI D2D2500i D2D4000i	External	Embedded Network Controller. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.	
HP D2D Backup Systems, Fibre	External	Direct server attach is not supported, requires connection via SAN fabric. See: http://www.hp.com/storage/SPOCK	

contents

Overview Standard Features Optional Features Service and Support Pre-configured Models
Configuration Information - Factory Integrated Models Core Options Additional Options Memory
Storage Power Specifications Technical Specifications

Power Specifications

HP 1200W Common Slot Silver Hot Plug Power Supply Kit							
Part Number	500172-B21						
Input Voltage Range (V rms)	100 to 240						
Frequency Range (Nominal) (Hz)	50/60						
Nominal Input Voltage (Vrms)	100	120	200	208	220	230	240
Maximum Rated Output Wattage Rating	800	900	1200	1200	1200	1200	1200
Nominal Input Current (A rms)	9.7	9.0	7.0	6.8	6.4	6.1	5.9
Maximum Rated Input Wattage Rating (Watts)	930	1034	1348	1348	1348	1348	1348
Maximum Rated VA (Volt-Amp)	970	1079	1406	1406	1406	1406	1406
Efficiency (%)	86	86	89	89	89	89	89
Power Factor	0.97						
Leakage Current (mA)	0.42	0.50	0.83	0.87	0.92	0.96	1.00
Maximum Inrush Current (A peak)	30						
Maximum Inrush Current duration (mS)	20						
Maximum British Thermal Unit Rating (BTU-Hr)	3174	3530	4600	4600	4600	4600	4600

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit							
Part Number	578322-B21						
Input Voltage Range (V rms)	100 to 240						
Frequency Range (Nominal) (Hz)	50/60						
Nominal Input Voltage (Vrms)	100	120	200	208	220	230	240
Maximum Rated Output Wattage Rating	800	900	1200	1200	1200	1200	1200
Nominal Input Current (A rms)	9.3	8.6	6.7	6.5	6.1	5.8	5.6
Maximum Rated Input Wattage Rating (Watts)	889	989	1290	1290	1290	1290	1290
Maximum Rated VA (Volt-Amp)	927	1031	1345	1345	1345	1345	1345
Efficiency (%)	90	91	93	93	93	93	93
Power Factor	0.97						
Leakage Current (mA)	0.42	0.50	0.83	0.87	0.92	0.96	1.00
Maximum Inrush Current (A peak)	30						
Maximum Inrush Current duration (mS)	20						
Maximum British Thermal Unit Rating (BTU-Hr)	3033	3375	4403	4403	4403	4403	4403

NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url:
www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor

contents

Overview Standard Features Optional Features Service and Support Pre-configured Models
Configuration Information - Factory Integrated Models Core Options Additional Options Memory
Storage Power Specifications Technical Specifications

Technical Specifications

System Unit

Dimensions (H x W x D) (with bezel)	6.94" x 19.0" x 27.55" (17.6cm x 48.3cm x 70.0cm)	
Weight (approximate)	Maximum (all hard drives, power supplies, DIMMs and processors installed)	100.0 lb (45.4 kg)
	Minimum (one hard drive, two power supplies, four DIMMs, and two processors installed)	66.0 lb (30.0 kg)
Input Requirements (per power supply)	Rated Line Voltage	100 - 127 VAC, 200 - 240 VAC
	Rated Input Current	12 A (at 100 VAC), 8 A (at 200 VAC)
	Rated Input Frequency	50 to 60 Hz
	Rated Input Power	1161 W (at 100 VAC), 1598 W (at 240 VAC)
BTU Rating	Maximum	3960 BTU/hr (at 100 VAC), 5450 BTU/hr (at 200 VAC)
Power Specifications	NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor - Click on the system of interest. Example: DL580 G7 - Follow the instructions of the next screens.	
Power Supply Output (per power supply)	Rated Steady-State Power	910 W (low line), 1300 W (high line)
	Maximum Peak Power	910 W (low line), 1300 W (high line)
System Inlet Temperature	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).
	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
Relative Humidity (non-condensing)	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
Altitude	Operating	3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA	

74) and declared in accordance with ISO 9296 (ECMA 109).

Idle

L WAd 6.4 B (with PCI-E)

L pAm NA dBA

Operating

L WAd 6.8 B (with PCI-E)

L pAm NA dBA

Emissions

Classification (EMC)

FCC Rating

Class A

Normative Standards

CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

Integrated Lights-Out 3 (iLO 3) integrated on system board

Architecture

PCI Express based health and remote management ASIC

Processor

PCI Express RISC processor core running at 250MHz

Upgradeability

Option firmware upgradeable via Flash ROM.

Interfaces

One Ethernet Sideband connection (10/100/1000 Mb/s)

One Ethernet network connection (10/100Mb/s)

Memory

128-MB RAM with ECC

Operating System Support

Microsoft Windows 2008 R2

Microsoft Windows 2008 (32 bit and 64 bit)

Microsoft Windows Server 2008 Standard Edition (32bit and 64bit)

Microsoft Windows Server 2008 Enterprise Edition (32bit and 64bit)

Microsoft Windows Server 2003 and Windows Server 2003 R2, and Windows Server 2003 for Extended Systems Standard Edition, Enterprise Edition

Red Hat Enterprise Linux 5.4 (32 bit and 64 bit)

SUSE LINUX Enterprise Server 11 (32bit and 64bit)

SUSE LINUX Enterprise Server 10 (32bit and 64bit)

VMware ESX 4.0

VMware ESX 3.5.0

Solaris

Client System Support

Microsoft Windows 7

Microsoft Windows XP Professional Edition

Microsoft Windows Vista Business and Ultimate Editions

Red Hat Enterprise Desktop 5.00

SUSE Linux Enterprise Desktop 11

SUSE Linux Enterprise Desktop 10

Client Browser Support

Microsoft Internet Explorer 8

Microsoft Internet Explorer 7

Microsoft Internet Explorer 6

Firefox 3.5 (on supported Windows and Linux systems)

Firefox 3.0 (on supported Windows and Linux systems)

Command Line Support

Secure Shell and serial port access

Secure Socket Layer

Secure Shell version 2

Security

Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser, CLP and XML scripting interface

AES encryption of video

RC4 encryption of video

Directory Support

Active Directory v1.0 (Windows 2003)

	Services		
	Driver Support	HP ProLiant iLO3 Management Controller Driver Package	
	Management protocols supported	SNMP, IPMI 2.0 (system and LAN interface), DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP), HP RIBCL XML	
Smart Array P410i Controller	Dimensions	Embedded	
	Disk Drive and Enclosure Interface - Transfer rate	6Gb/s SAS (Serial Attached SCSI) 3Gb/s SATA (Serial ATA)	
	SAS Connectors	2 internal 4X connectors	
	Cache Memory Speed	DDR2-800MHz with 40 or 72-bit wide bus	
	Server Interface	x4 PCIe 2.0 provides 2GB/s maximum bandwidth	
	SAS Speed	8 6Gb/s SAS links provide 4.8GB/s maximum bandwidth	
	Cache Memory	Zero Memory RAID has no cache memory 40-bit 256MB ECC protected cache (battery upgrade available) 72-bit 512MB BBWC or 72-bit 512MB and 1G FBWC	
	Logical Drives Supported	Zero Memory, Up to 2 logical volumes (8 physical drives) Up to 64 logical drives with cache	
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space	
	RAID Support	RAID 6, 6+0 (Advanced Data Guarding) NOTE: RAID 6, 6+0 can be enabled with one of the following combinations: <ul style="list-style-type: none"> 256 MB cache, Battery kit and Smart Array Advanced Pack License key option upgrades 512 MB BBWC/FBWC and Smart Array Advanced Pack License key option upgrades 1G FBWC and Smart Array Advanced Pack License key option upgrades 	
		RAID 5, 5+0 (Distributed Data Guarding) NOTE: A minimum of 256 MB cache is required to enable RAID 5, 5+0 support	
		RAID 1+0 (Striping & Mirroring)	
		RAID 0 (Striping), RAID 1 (Mirroring)	
HP NC375i Integrated Quad Port Gigabit Server Adapter	Network Interface Compatibility	10Base-T/100Base-TX/1000Base-TX IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX IEEE 802.3ad 1000Base-TX IEEE 802.1p 100Base-TX IEEE 802.1q 100Base-TX	
	Data Transfer Method	PCI-Express 2.0 x8	
	Controller	Qlogic/NetXen NX3031	
	Network Transfer Rate	10Base-T (Full-Duplex)	20 Mb/s
		100Base-TX (Full-Duplex)	200 Mb/s
		1000Base-TX (Full-Duplex)	2000 Mb/s
	Connector	RJ-45	
	Cable Support	10Base-T	Categories 3, 4, or 5 UTP; up to 328 ft (100 m)
		100Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)
		1000Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)

Environment-friendly Products and Approach **End-of-life Management and Recycling** Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2013 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Unix is a registered trademark of The Open Group.

Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

DA-13669 39 - Version 39 - March 25, 2013